



(a) 60" MINIMUM X 30" MINIMUM ROLL-IN SHOWER

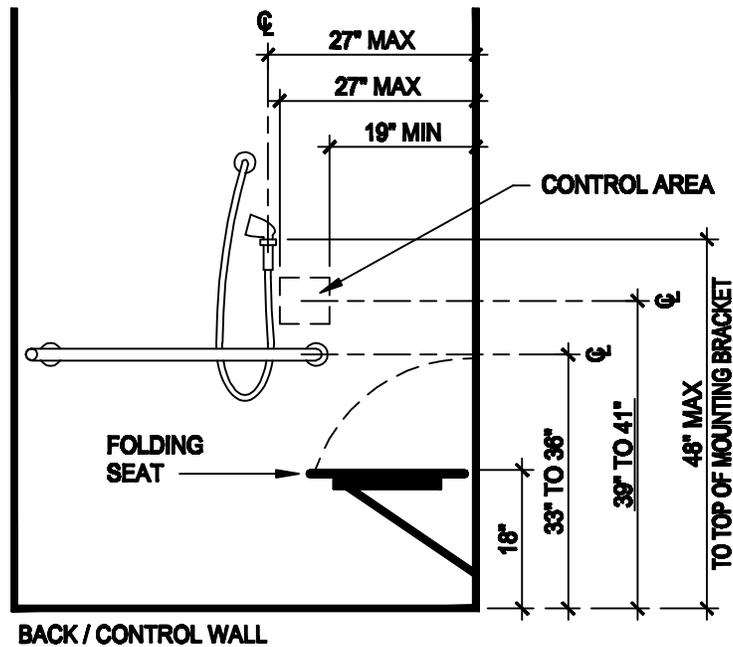


(b) ELEVATION - 60" MINIMUM X 30" MINIMUM ROLL-IN SHOWER

FIGURE 11B-2A - SHOWER STALLS

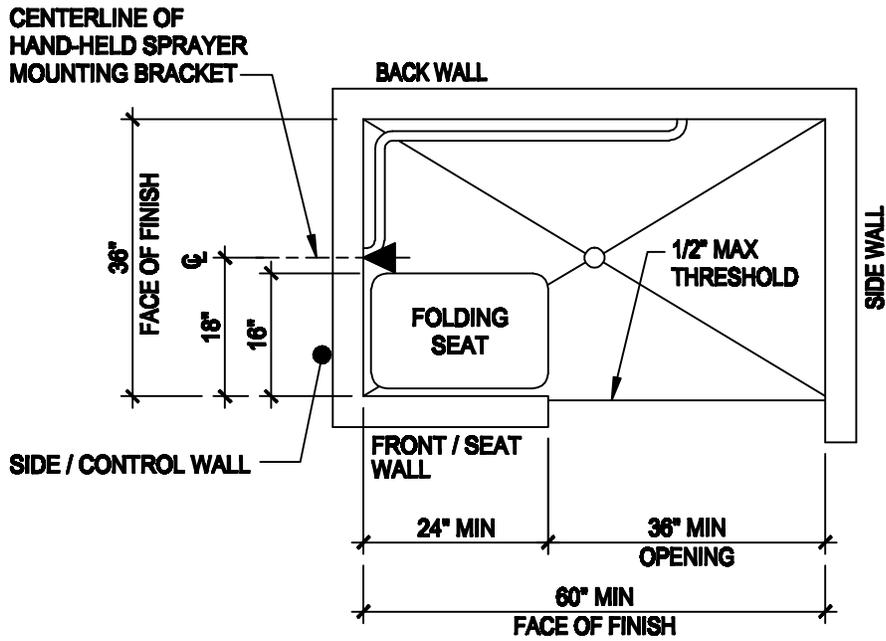


(a) 60" MINIMUM X 36" ALTERNATE ROLL-IN SHOWER

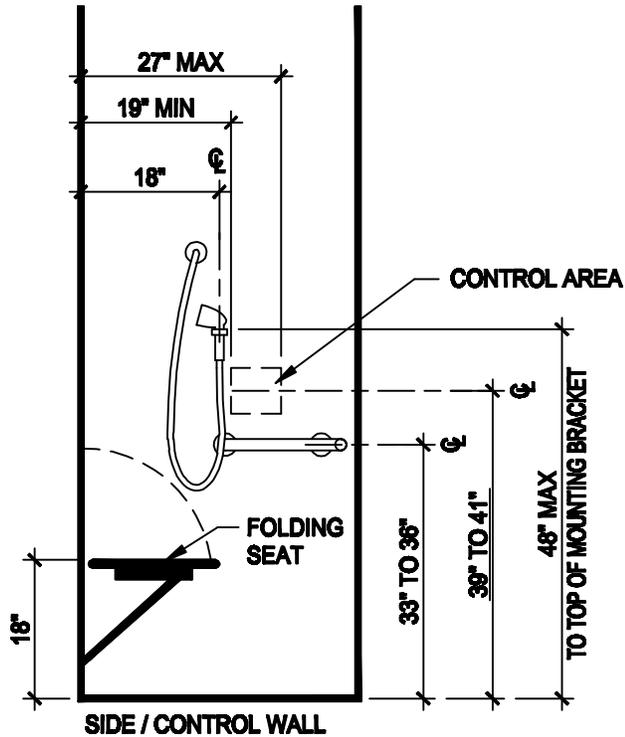


(b) ELEVATION - 60" MINIMUM X 36" ALTERNATE ROLL-IN SHOWER

FIGURE 11B-2B - SHOWER STALLS (CONT)

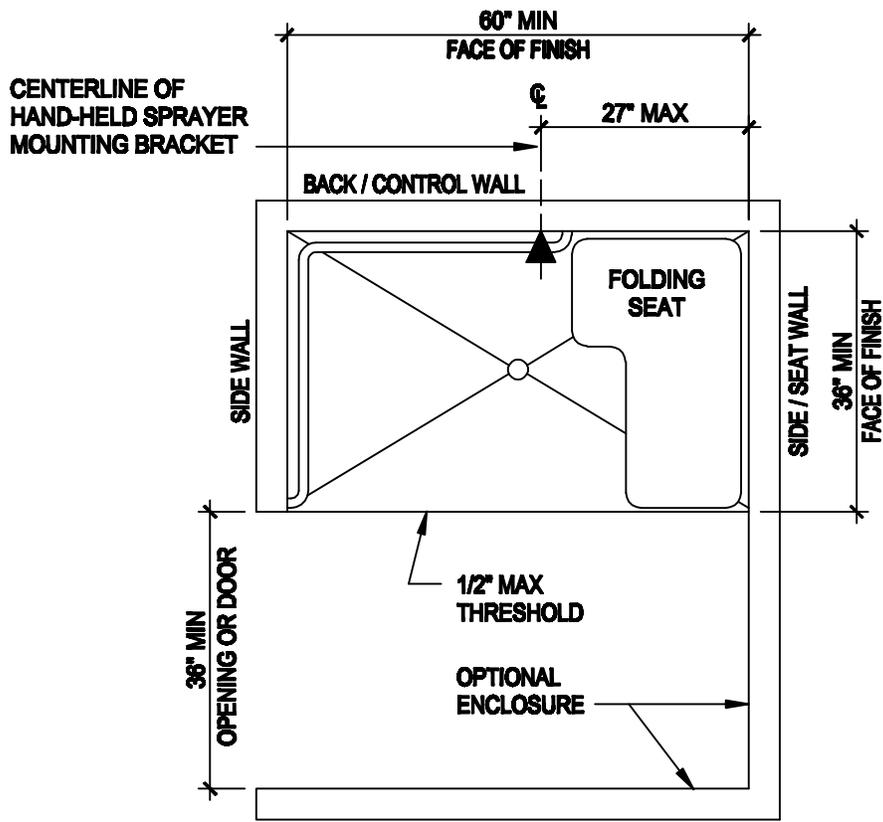


(a) 60" MINIMUM X 36" MINIMUM ALTERNATE ROLL-IN SHOWER WITH OPTIONAL ENCLOSURE

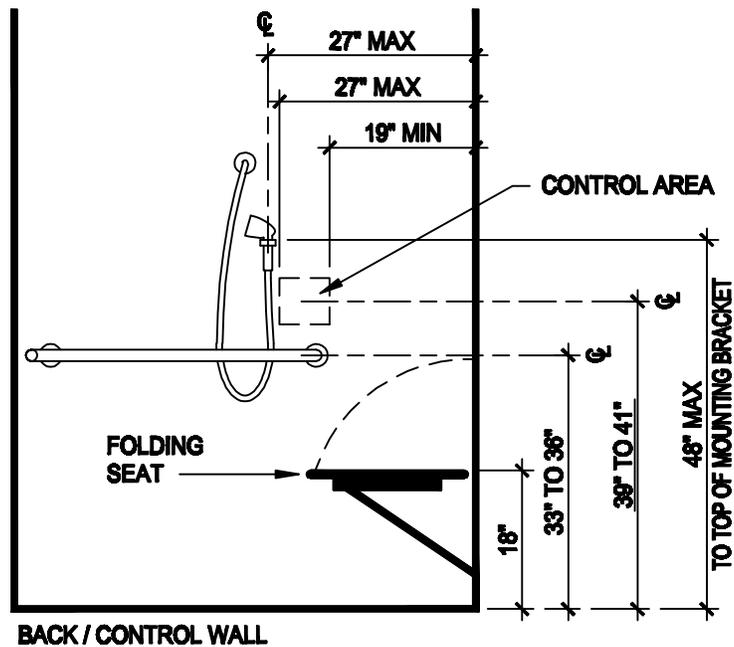

(b) ELEVATION - 60" MINIMUM X 36" MINIMUM ALTERNATE ROLL-IN SHOWER WITH OPTIONAL ENCLOSURE


FIGURE 11B-2C - SHOWERS STALLS (CONT)

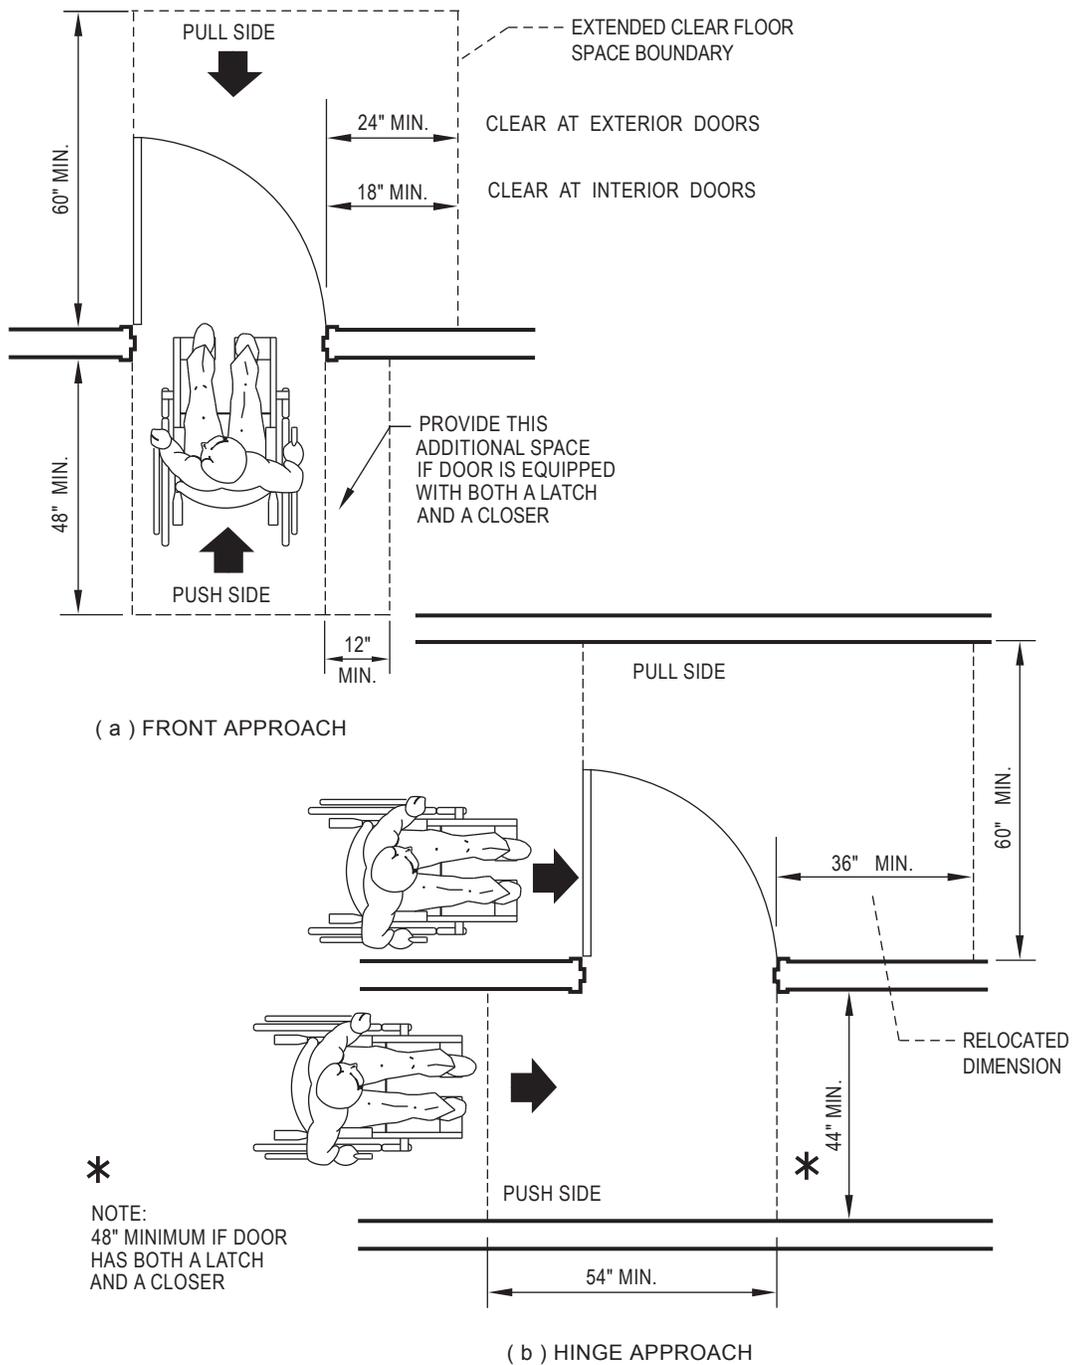

\* NOTE: ALL DOORS IN ALCOVES SHALL COMPLY WITH THE CLEARANCES FOR FRONT APPROACHES.

THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

FIGURE 11B-26A—LEVEL MANEUVERING CLEARANCE AT DOORS (Continued)

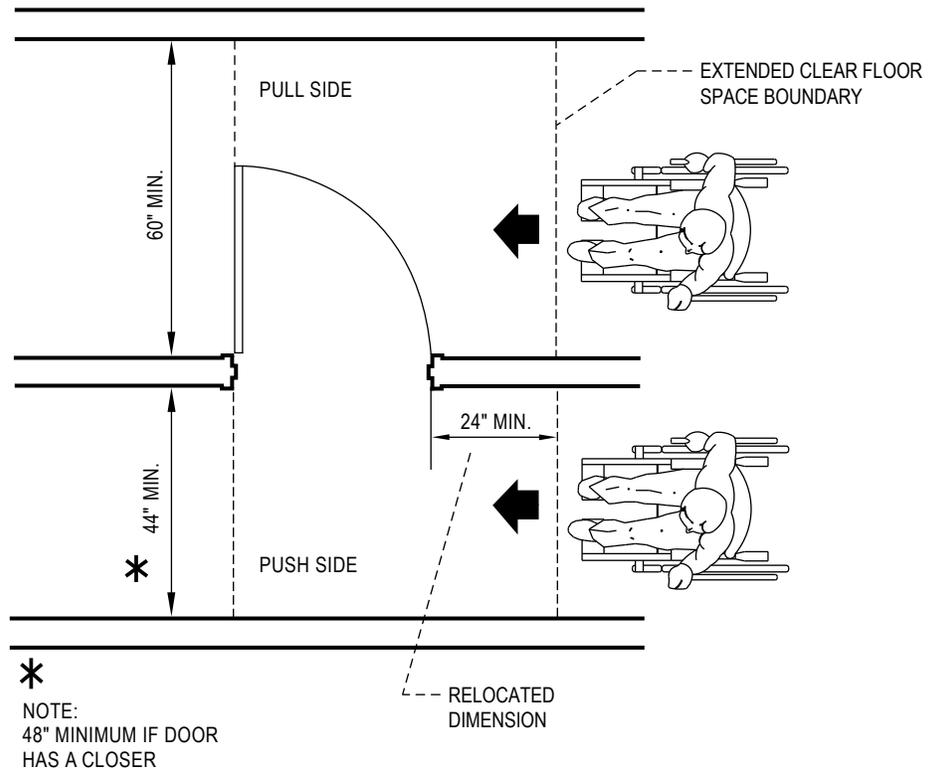


(c) LATCH APPROACH


\* NOTE: ALL DOORS IN ALCOVES SHALL COMPLY WITH THE CLEARANCES FOR FRONT APPROACHES.

THIS DIAGRAM ILLUSTRATES THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND IS INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

FIGURE 11B-26B—LEVEL MANEUVERING CLEARANCE AT DOORS

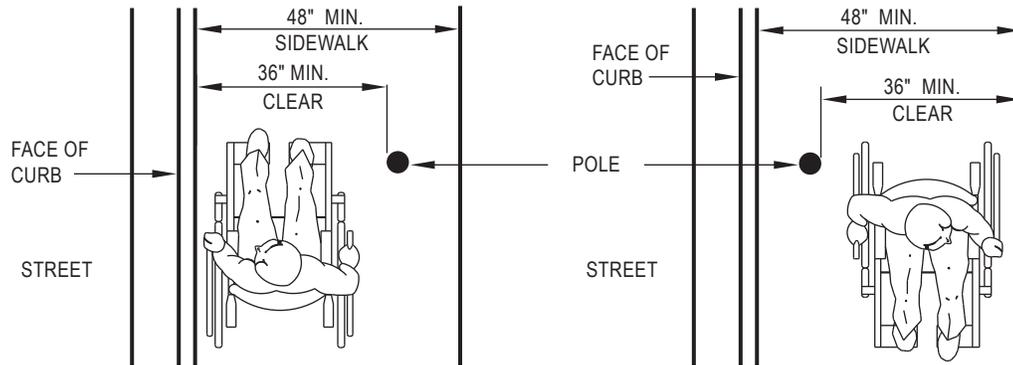


( a ) SIDEWALK OBSTRUCTIONS

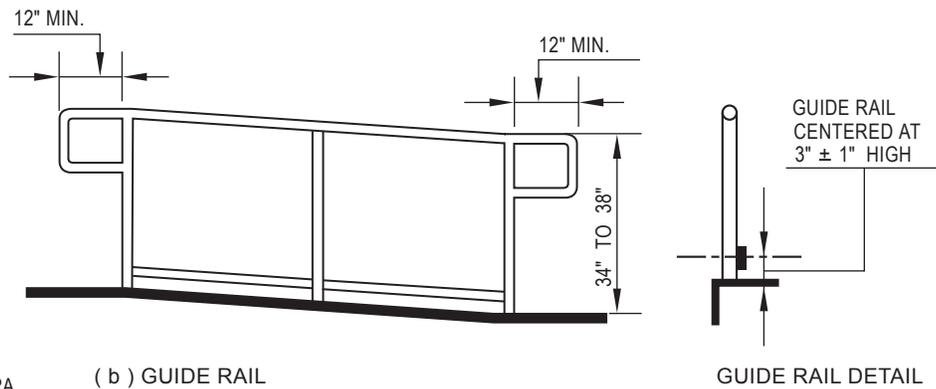

( b ) GUIDE RAIL

GUIDE RAIL DETAIL

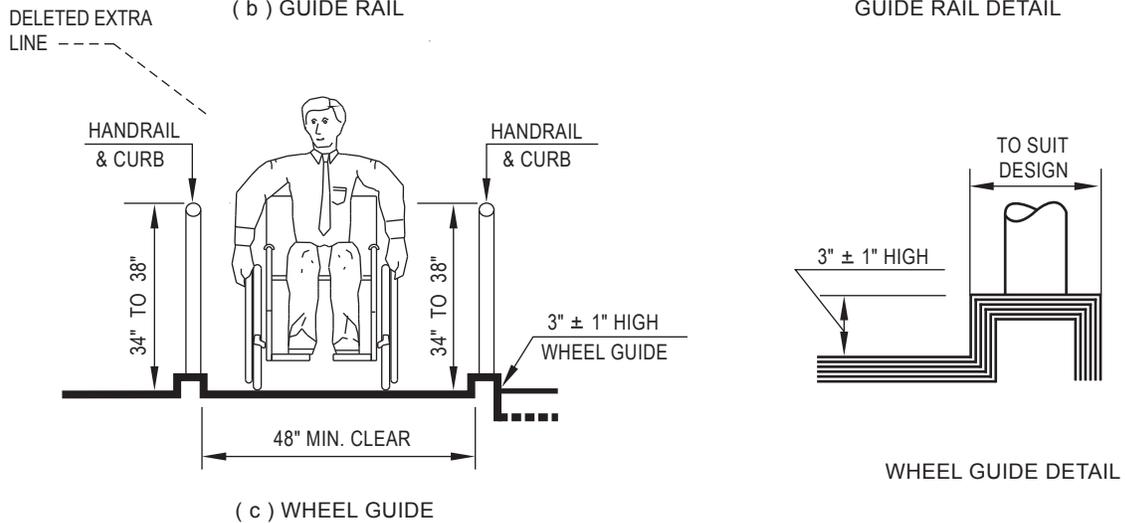

( c ) WHEEL GUIDE

WHEEL GUIDE DETAIL

THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

FIGURE 11B-27—RAMPS AND SIDEWALKS




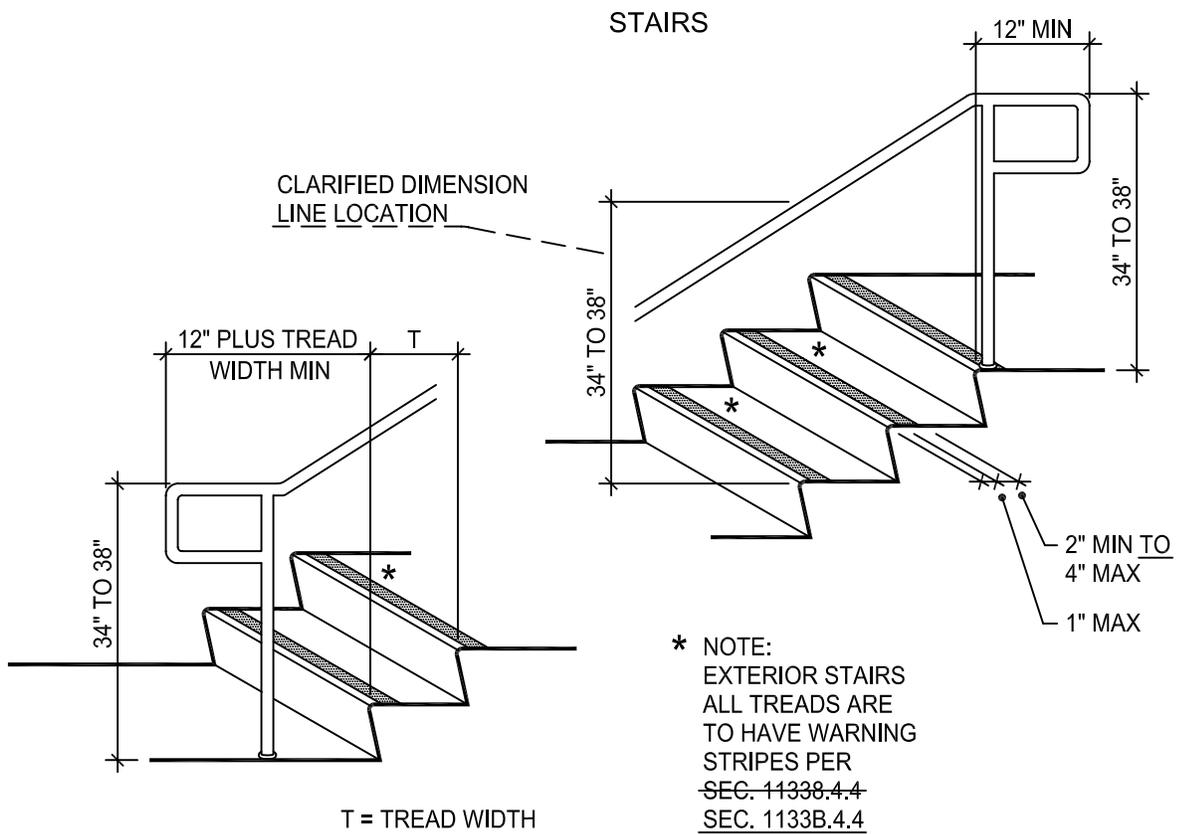


FIGURE 11B-35 - WARNING STRIPING AND HANDRAIL EXTENSIONS

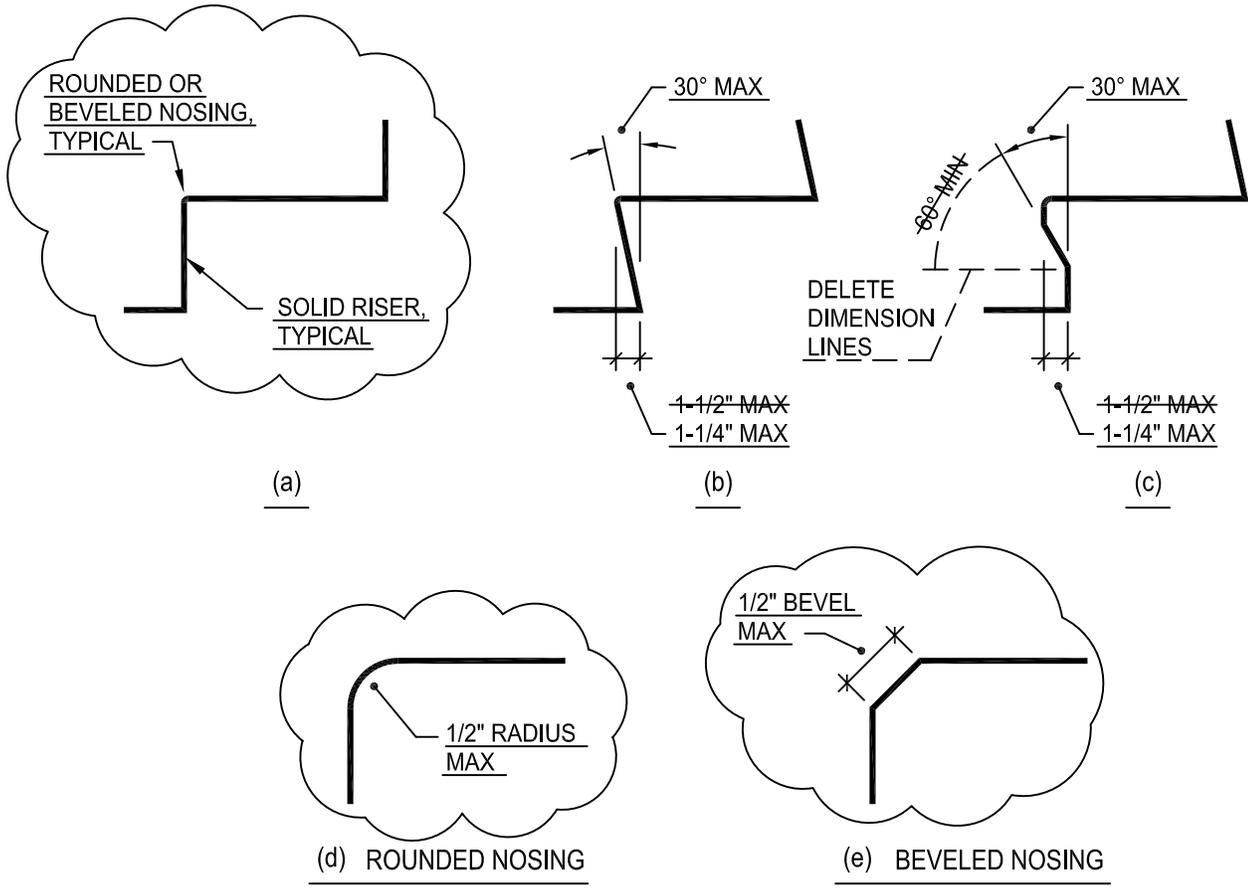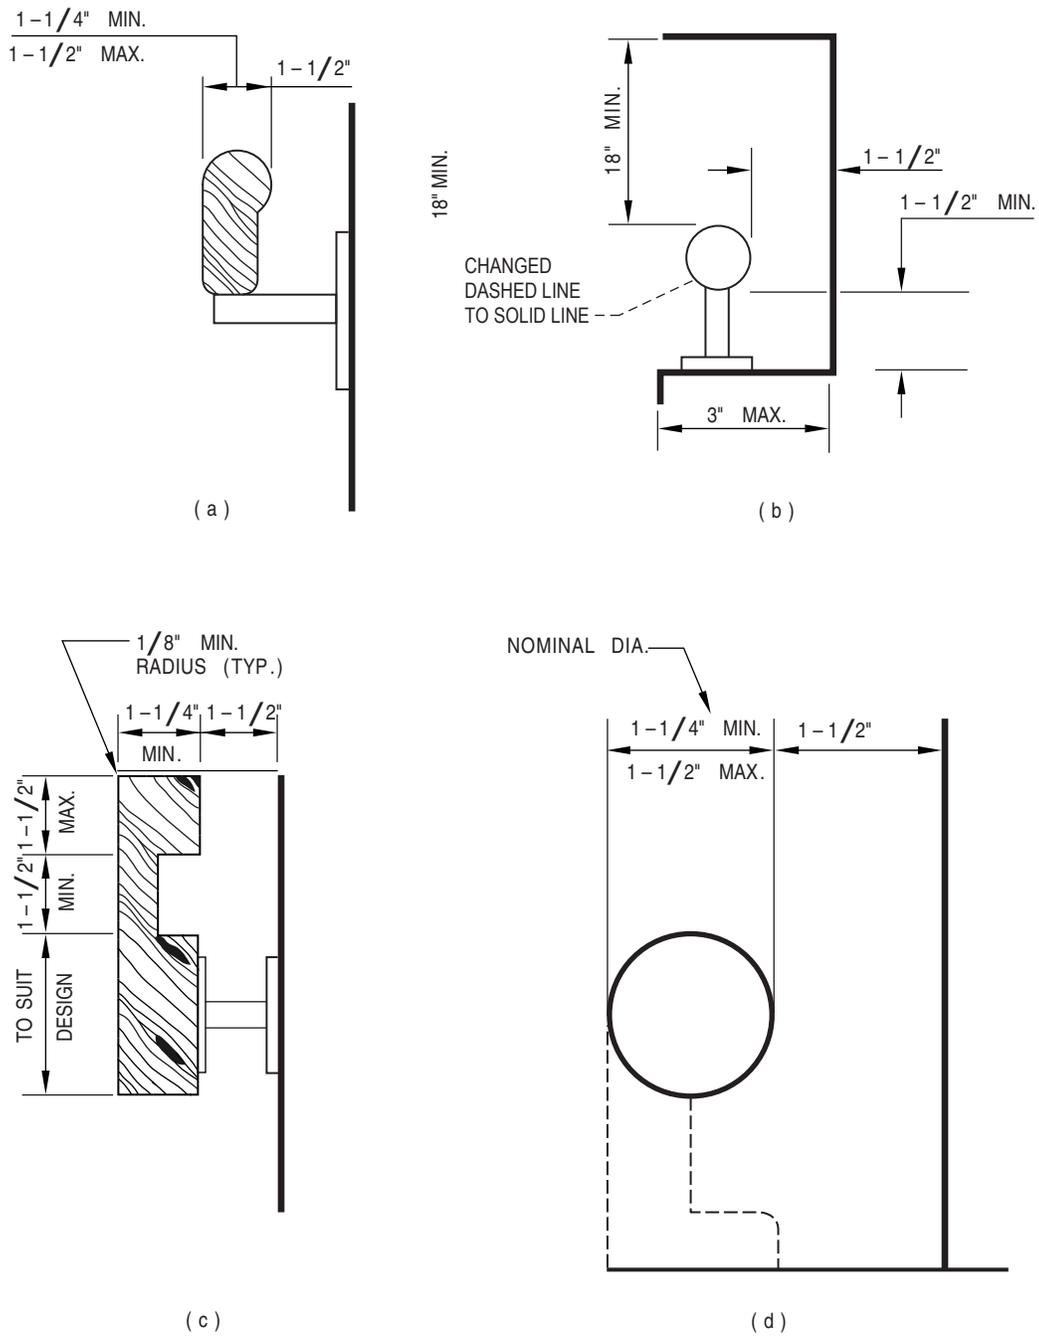

THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

FIGURE 11B-36—STAIR HANDRAILS

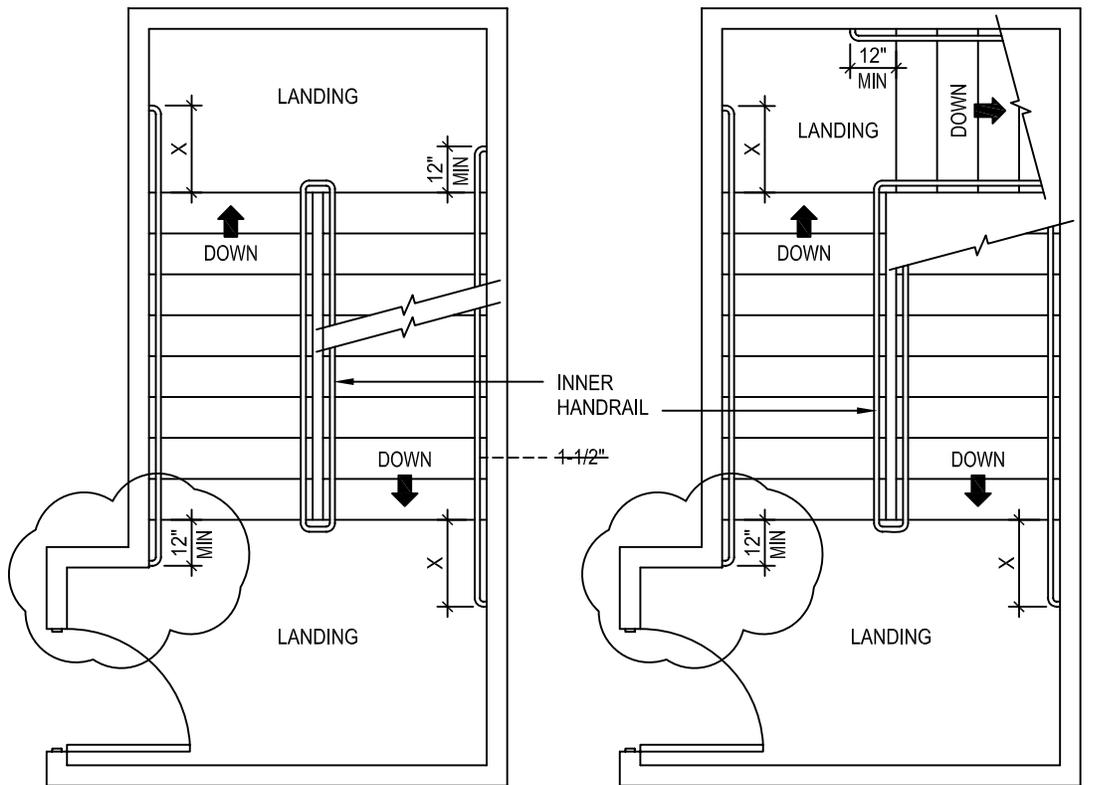

NOTE: INNER HANDRAIL AT LANDINGS OF STAIRS THAT DOUBLE BACK OR IMMEDIATELY TURN SHALL BE CONTINUOUS AND SHALL NOT EXTEND INTO LANDING OR PATH ACCESSIBLE ROUTE OF TRAVEL

X = EXTENSION OF HANDRAIL SHALL BE EQUAL TO THE TREAD WIDTH PLUS 12 INCHES MINIMUM

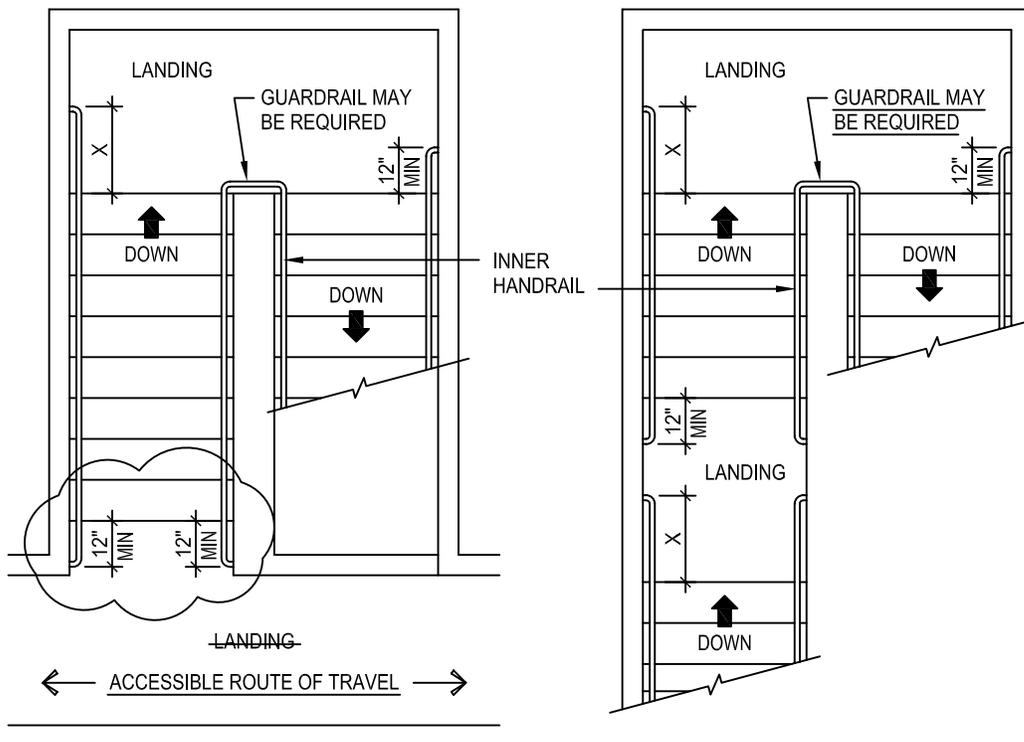


FIGURE 11B-37 - STAIR HANDRAILS