DEPT CODE:
REPORT DATE: 08/09/91
SURVEYOR: RGA

OFFICE OF THE STATE ARCHITECT
ASBESTOS PROGRAM
HOMOGENEOUS MATERIAL SURVEY REPORT

OSA#	BUILDING NAME	FACILITY	ADDRESS	CITY	ZIP	COUNTY
30691	MEMORIAL GARDEN BUILDING	32ND DISTRICT AGRICULTURAL ASSOCIATION	88 FAIR DR	COSTA MESA	92626	ORANGE

ROOM NAME/ FUNCTIONAL AREA	FLOOR#	MATERIAL LOCATION IN ROOM	QTY	UNITS	ALGORITHM SCORE	PRIORITY	ASSUMED / CONCEALED	** SAMPLE RESULTS ** PERCENTAGE RANGE	ASBESTOS TYPES
M1 FINISH PLASTER BEIGE, HARD STUCCO MATERIAL								NONE DETECTED - 3	CHR
R1 BUILDING EXTERIOR		BUILDING EXTERIOR	392	SY	52	L			
M2 RESILIENT FLOORING (SHEETS) LIGHT BEIGE W/YLLW & LGT BRWN								NONE DETECTED	
R6 KITCHEN	1	FLOOR THROUGHOUT	35	SY					
R7 CONFERENCE ROOM	1	FLOOR	11	SY					
R9 UPSTAIRS MEN'S RESTROOM	2	FLOOR	6	SY					
R10 UPSTAIRS WOMEN'S RESTROOM	2	FLOOR	4	SY					
R14 BAR AND LOUNGE	2	FLOOR	11	SY					
R16 WEST HALLWAY	1	FLOOR	3	SY					
M3 GYPSUM WALLBOARD WALLBOARD MUD, TAPE AND COMPOUND								NONE DETECTED	
R3 DOWNSTAIRS MEN'S RESTROOM	1	ALL WALLS	109	SF					
R4 DOWNSTAIRS WOMEN'S RESTROOM	1	NORTH WALL	55	SF					
R5 DOWNSTAIRS SHOWER	1	SOUTH WALL	55	SF					
R6 KITCHEN	2	EAST AND WEST WALLS	420	SF					
R7 CONFERENCE ROOM	1	ALL WALLS	2,500	SF					
R8 STAIRCASE	1	NORTH AND SOUTH WALLS	400	SF					
R9 UPSTAIRS MEN'S RESTROOM	2	WALLS AND CEILING	450	SF					
R10 UPSTAIRS WOMEN'S RESTROOM	2	WALLS AND CEILING	270	SF					
R11 UPSTAIRS SHOWER	2	ALL WALLS	300	SF					

ASBESTOS TYPES: CHR = CHRYSOTILE, AMO = AMOSITE, CRO = CROCIDOLITE, ACT = ACTINOLITE, ANT = ANTHOPHYLLITE, TRE = TREMOLITE

OFFICE OF THE STATE ARCHITECT
ASBESTOS PROGRAM
HOMOGENEOUS MATERIAL SURVEY REPORT

DEPT CODE:
REPORT DATE: 08/09/91
SURVEYOR: RGA

OSA#	BUILDING NAME	FACILITY	ADDRESS	CITY	ZIP	COUNTY
30691	MEMORIAL GARDEN BUILDING	32ND DISTRICT AGRICULTURAL ASSOCIATION	88 FAIR DR	COSTA MESA	92626	ORANGE

ROOM NAME/ FUNCTIONAL AREA	FLOOR#	MATERIAL LOCATION IN ROOM	QTY	UNITS	ALGORITHM SCORE	PRIORITY	ASSUMED / CONCEALED	** SAMPLE RESULTS ** PERCENTAGE RANGE	ASBESTOS TYPE
R12 LOCKER ROOM	2	ALL WALLS	1,200	SF					
R13 UPSTAIRS HALLWAY	2	NORTH AND SOUTH WALLS	116	SF					
R14 BAR AND LOUNGE	2	NORTH AND SOUTH WALLS	1,750	SF					
R15 UPSTAIRS MEETING ROOM	2	ALL WALLS	2,100	SF					
R16 DOWNSTAIRS HALLWAY	1	EAST AND WEST WALLS	320	SF					
M4 ROOFING TILES RED AND BLACK 4 X 12 INCH								NONE DETECTED	
R17 ROOF		ROOF	3,000	SQ					
M5 FIRE DOORS EXTERIOR FIRST FLOOR DOORS									
R7 CONFERENCE ROOM	1	FIRST FLOOR EXIT DOOR/NORTH WALL	1	EA	36	L	ASSUMED		
R16 DOWNSTAIRS HALLWAY	1	FIRST FLOOR EXIT DOOR	1	EA	36	L	ASSUMED		

ASBESTOS TYPES: CHR = CHRYSOTILE, AMO = AMOSITE, CRO = CROCIDOLITE, ACT = ACTINOLITE, ANT = ANTHOPHYLLITE, TRE = TREMOLITE

DEPT CODE:
REPORT DATE: 08/09/91
SURVEYOR: RGA

OFFICE OF THE STATE ARCHITECT
ASBESTOS PROGRAM
HOMOGENEOUS MATERIAL SURVEY REPORT

OSA#	BUILDING NAME	FACILITY	ADDRESS	CITY	ZIP	COUNTY
30690	BUILDING #16	32ND DISTRICT AGRICULTURAL ASSOCIATION	88 FAIR DR	COSTA MESA	92626	ORANGE

ROOM NAME/ FUNCTIONAL AREA	FLOOR#	MATERIAL LOCATION IN ROOM	QTY	UNITS	ALGORITHM SCORE	PRIORITY	ASSUMED / CONCEALED	** SAMPLE RESULTS ** PERCENTAGE RANGE	ASBESTOS TYPES
M1 FINISH PLASTER BEIGE, HARD STUCCO								NONE DETECTED	
R1 BUILDING EXTERIOR		EXTERIOR OF BUILDING	500	SY					
								NONE DETECTED	
M2 FIREPROOFING (SPRAYED) GREY, FLUFFY, SOFT									
R9 MAIN EXHIBITION AREA	1	SPRAYED ON METAL PAN	20,000	SF					
								NONE DETECTED	
M3 BUILTUP ROOFING BLACK AND WHITE TAR AND GRAVEL									
R10 BUILDING EXTERIOR	1	LOW ROOF ON NORTH SIDE	3,700	SQ					

ASBESTOS TYPES: CHR = CHRYSOTILE, AMO = AMOSITE, CRO = CROCIDOLITE, ACT = ACTINOLITE, ANT = ANTHOPHYLLITE, TRE = TREMOLITE

DEPT CODE:
REPORT DATE: 08/09/91
SURVEYOR: RGA

OFFICE OF THE STATE ARCHITECT
ASBESTOS PROGRAM
HOMOGENEOUS MATERIAL SURVEY REPORT

OSA#	BUILDING NAME	FACILITY	ADDRESS	CITY	ZIP	COUNTY
30689	BUILDING #10	32ND DISTRICT AGRICULTURAL ASSOCIATION	88 FAIR DR	COSTA MESA	92626	ORANGE

ROOM NAME/ FUNCTIONAL AREA	FLOOR#	MATERIAL LOCATION IN ROOM	QTY	UNITS	ALGORITHM SCORE	PRIORITY	ASSUMED / CONCEALED	** SAMPLE RESULTS ** PERCENTAGE RANGE	ASBESTOS TYPES
M1 FINISH PLASTER BEIGE, HARD, ROUGH MATERIAL								NONE DETECTED - 0.1	CHR
R1 BUILDING EXTERIOR		EXTERIOR OF BLDG, EAST WALL & NE CORNER OF BLDG	760	SY	12	L			
M2 ACOUSTICAL (TILES) 2X4 FOOT UNEVEN-SPACED HOLES								NONE DETECTED	
R2 FOOD SERVICE AREA, NE CORNER	1	CEILING	2,000	SF					
R14 JANITOR AND KITCHEN, NE CORNER		CEILING	160	SF					
M3 GYPSUM WALLBOARD WALLBOARD, TAPE AND COMPOUND								NONE DETECTED	
R2 FOOD SERVICE AREA, NE CORNER	1	NORTH AND EAST WALLS	300	SF					
R13 STORAGE NORTH OF FOOD SERVICE	1	EAST, SOUTH AND WEST WALLS	800	SF					
R14 JANITOR AND KITCHEN, NE CORNER		SOUTH AND WEST WALLS	400	SF					
R15 SERVING AREA	1	NORTH, EAST AND SOUTH WALLS	1,000	SF					
M4 TRANSITE SIDING BEIGE, PAINTED 3 X 10 FOOT PANELS								25 - 35	CHR
R1 BUILDING EXTERIOR		ALL SIDES OF BUILDING	9,600	SF	16	L			
M5 NON CODIFIED ACM GREY, CEMENTITIOUS, CORRIGATED								25 - 35	CHR
R16 ROOF		ROOF	40,000	SF	14	L			

ASBESTOS TYPES: CHR = CHRYSOTILE, AMO = AMOSITE, CRO = CROCIDOLITE, ACT = ACTINOLITE, ANT = ANTHOPHYLLITE, TRE = TREMOLITE

OFFICE OF THE STATE ARCHITECT
ASBESTOS PROGRAM
HOMOGENEOUS MATERIAL SURVEY REPORT

REPORT DATE: 08/09/91
SURVEYOR. RGA

OSA#	BUILDING NAME	FACILITY	ADDRESS	CITY	ZIP	COUNTY
30688	BUILDING #14	32ND DISTRICT AGRICULTURAL ASSOCIATION	88 FAIR DR	COSTA MESA	92626	ORANGE

ROOM NAME/ FUNCTIONAL AREA	FLOOR#	MATERIAL LOCATION IN ROOM	QTY	UNITS	ALGORITHM SCORE	PRIORITY	ASSUMED / CONCEALED	** SAMPLE RESULTS ** PERCENTAGE RANGE	ASBESTOS TYPES
M1 FINISH PLASTER BEIGE (PAINTED), STUCCO MATERIAL								NONE DETECTED - 1	CHR
R1 EXTERIOR OF BUILDING	1	EXTERIOR OF BUILDING (ALL WALLS)	390	SY	18	L			
M2 FIREPROOFING (SPRAYED) GREY, FLUFFY MATERIAL								**NONE DETECTED**	
R9 MAIN EXHIBITION AREA	1	ON METAL CEILING PAN, THROUGHOUT ROOM	12,000	SF					

ASBESTOS TYPES: CHR = CHRYSOTILE, AMO = AMOSITE, CRO = CROCIDOLITE, ACT = ACTINOLITE, ANT = ANTHOPHYLLITE, TRE = TREMOLITE

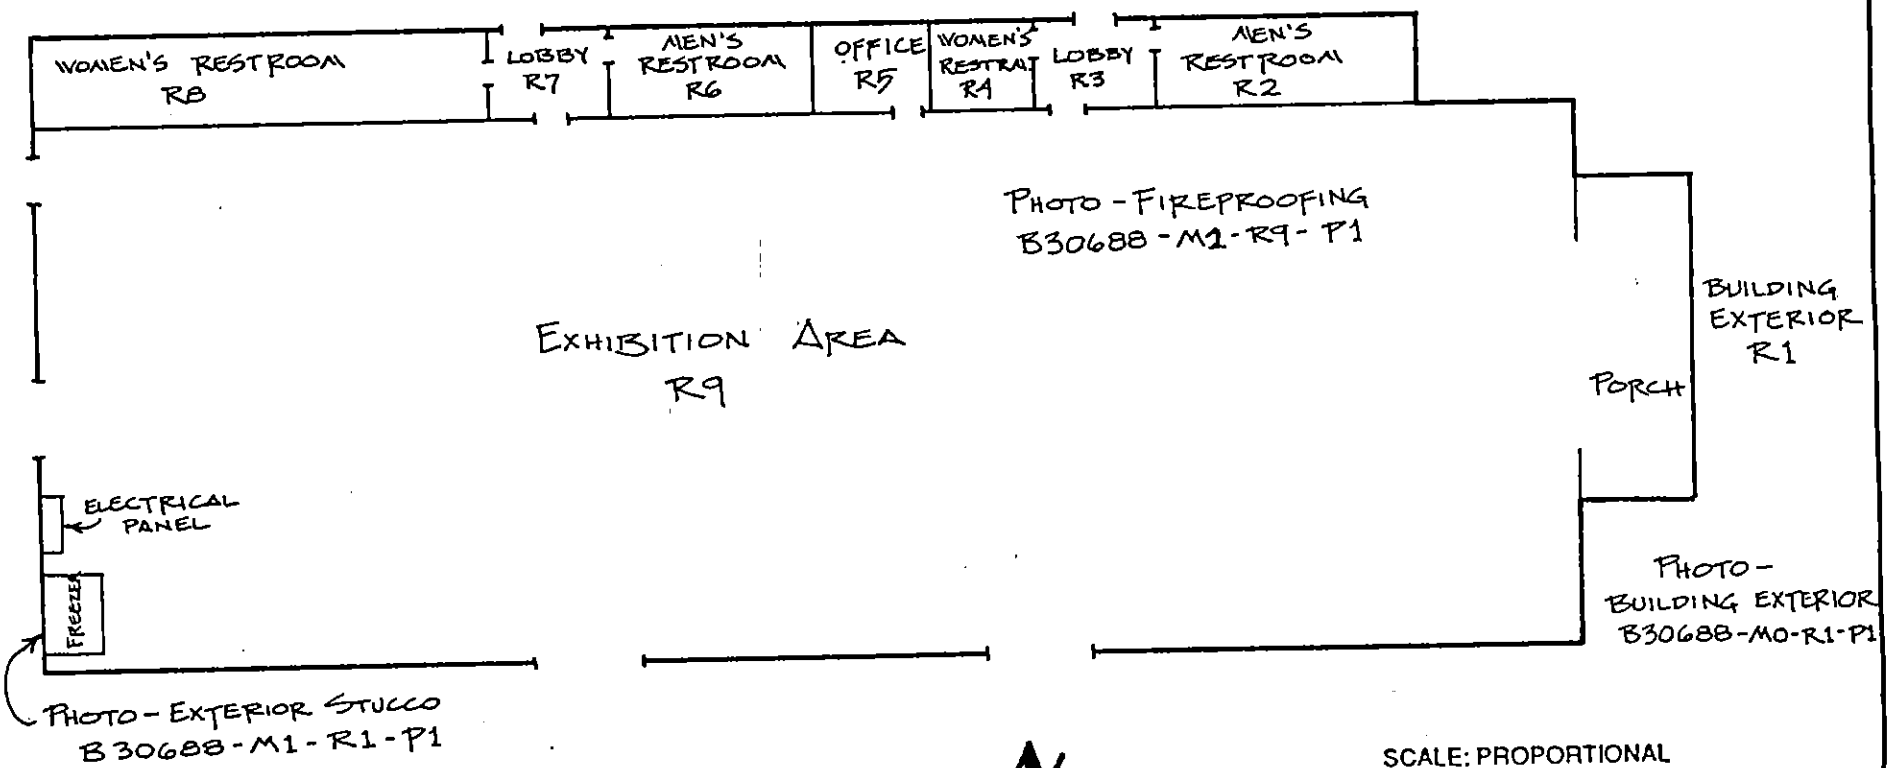

SCALE: PROPORTIONAL

OSA ASBESTOS SURVEY
ROOM REFERENCE NUMBERING SCHEME

Prepared By D.S. Date 11/26 RGA (Firm Code)

Checked By K.S. Date 11/26

Facility Name 32ND DIST. AG. ASSOCIATION

OSA Bld No. 30688 Dept Code DAA

Building Name ORANGE COUNTY BUILDING #19

Sketch No. B 30688 - D 1 Sht 1 of 1
[OSA Bld No]

Note: Room names and numbers are assigned by the Inspector and may not agree with those assigned by the facility. Room numbers shall not be duplicated within a given building.

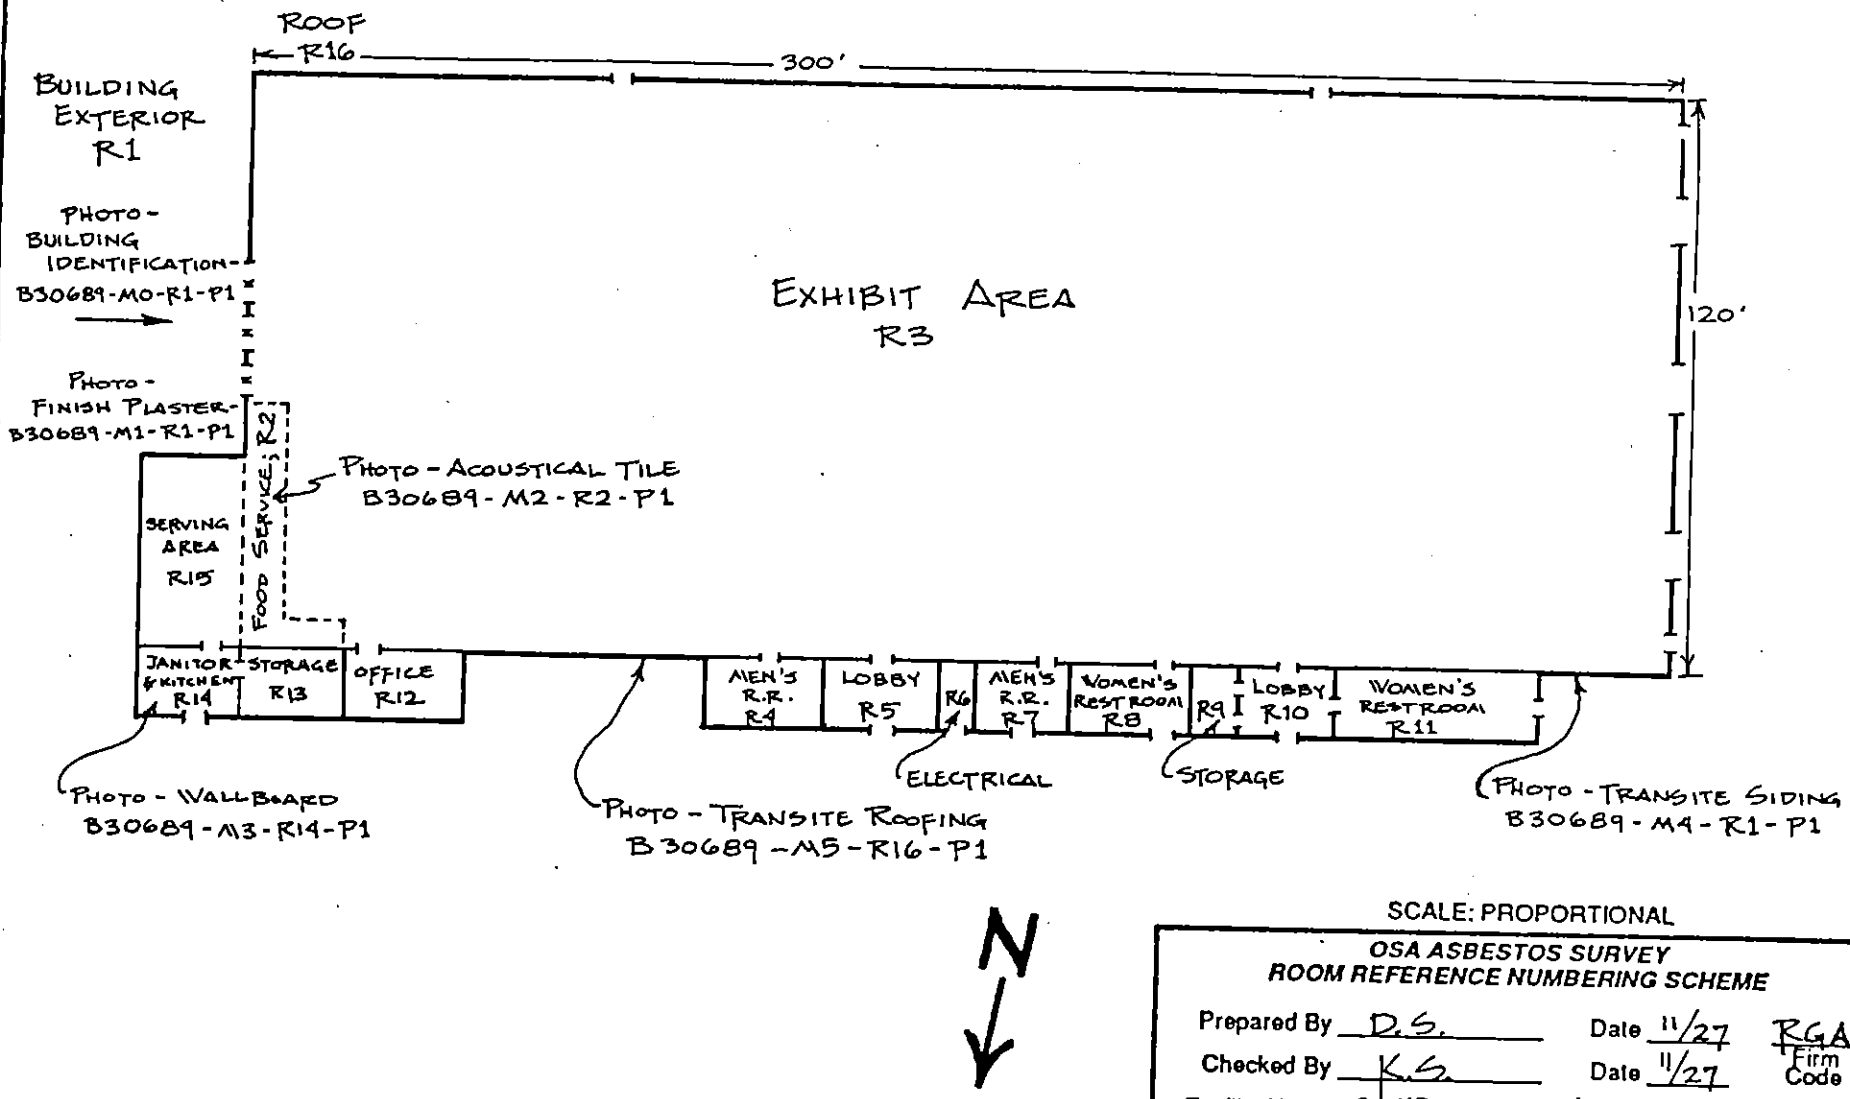

SCALE: PROPORTIONAL

OSA ASBESTOS SURVEY
ROOM REFERENCE NUMBERING SCHEME

Prepared By D.S. Date 11/27 RGA (Firm Code)

Checked By K.S. Date 11/27

Facility Name 32ND DIST. AG. ASSOCIATION

OSA Bld No. 30689 Dept Code DAA

Building Name COMMERCE BUILDING #10

Sketch No. B 30689 - D 1 Sht 1 of 1
[OSA Bld No]

Note: Room names and numbers are assigned by the Inspector and may not agree with those assigned by the facility. Room numbers shall not be duplicated within a given building.

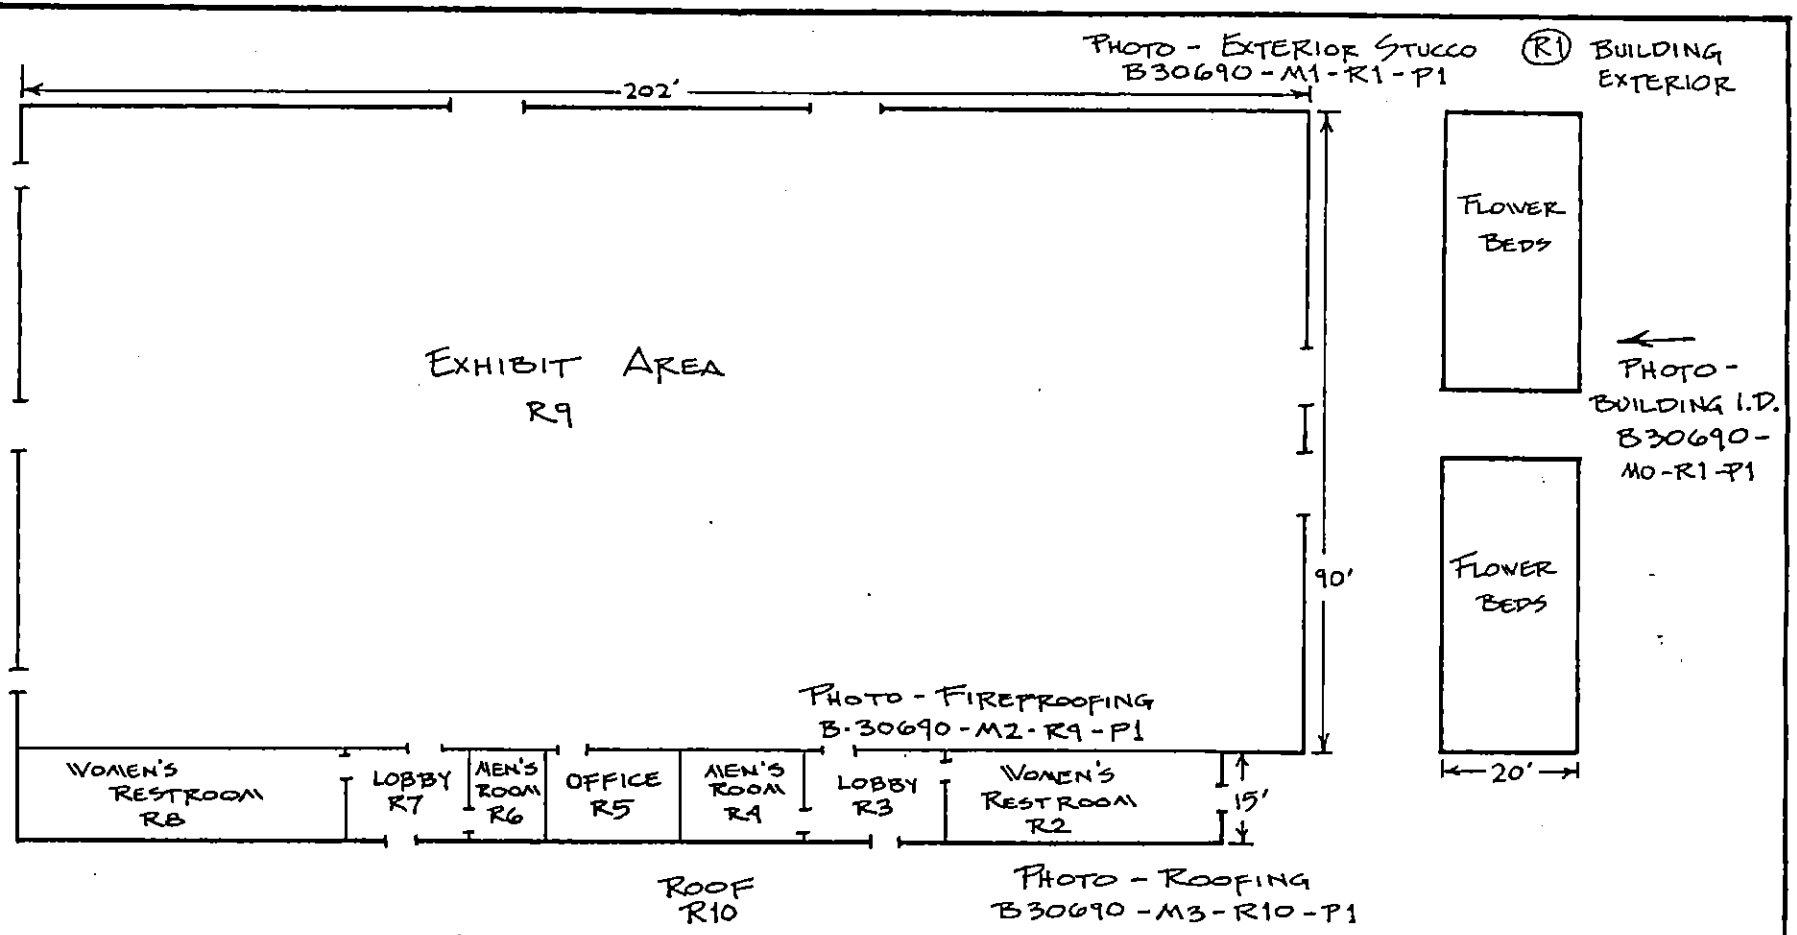

SCALE: PROPORTIONAL

N

Note: Room names and numbers are assigned by the Inspector and may not agree with those assigned by the facility. Room numbers shall not be duplicated within a given building.

OSA ASBESTOS SURVEY
ROOM REFERENCE NUMBERING SCHEME

Prepared By D.S. Date 11/26 RGA (Firm Code)

Checked By KA Date 11/26

Facility Name 32nd DISTRICT AG. ASSOCIATION

OSA Bld No. 30690 Dept Code DAA

Building Name HOME ARTS #16

Sketch No. B 30690 - D 1 Sht 1 of 1
[OSA Bld No]

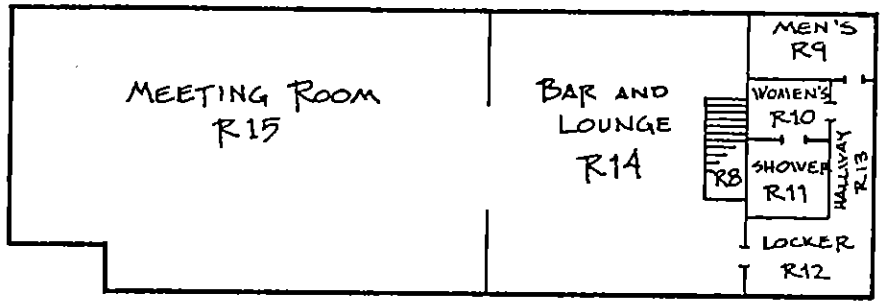

SECOND FLOOR

PHOTO - ROOFING TILES
B30691 - M4 - R17 - P1

ROOF
R17

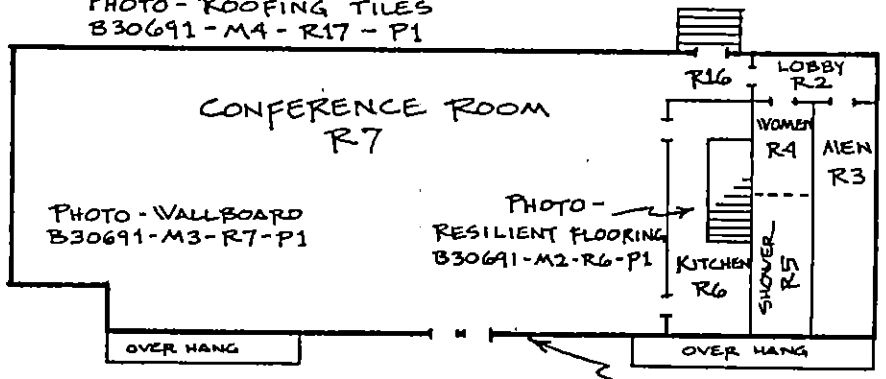

PHOTO - WALLBOARD
B30691 - M3 - R7 - P1

PHOTO -
RESILIENT FLOORING
B30691 - M2 - R6 - P1

BUILDING EXTERIOR
R1

FIRST FLOOR

PHOTO - STUCCO
B30691 - M1 - R1 - P1

PHOTO - BUILDING IDENTIFICATION
B30691 - M0 - R1 - P1
- P2

N

SCALE: PROPORTIONAL

OSA ASBESTOS SURVEY
ROOM REFERENCE NUMBERING SCHEME

Prepared By D.S. Date 11/27 RGA (Firm Code)
Checked By K.S. Date 11/27
Facility Name 32ND DISTRICT AG. ASSOCIATION
OSA Bld No. 30691 Dept Code DAA
Building Name MEMORIAL GARDENS
Sketch No. B 30691 - D 1 Sht 1 of 1
(OSA Bld No)

Note: Room names and numbers are assigned by the inspector and may not agree with those assigned by the facility. Room numbers shall not be duplicated within a given building.

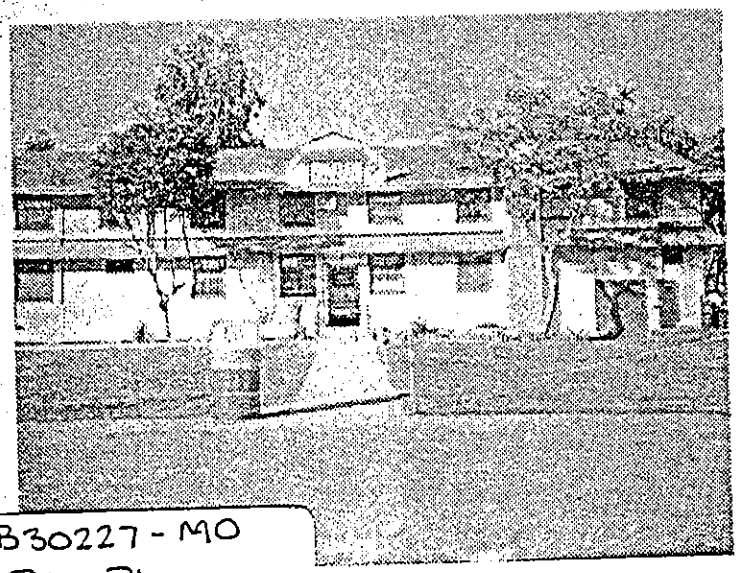

B30227 - M0
R1 - P1

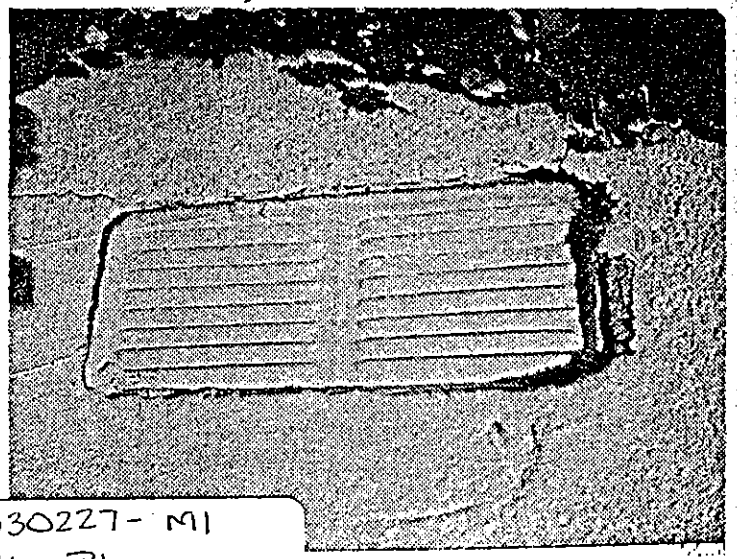

B30227 - M1
R1 - P1

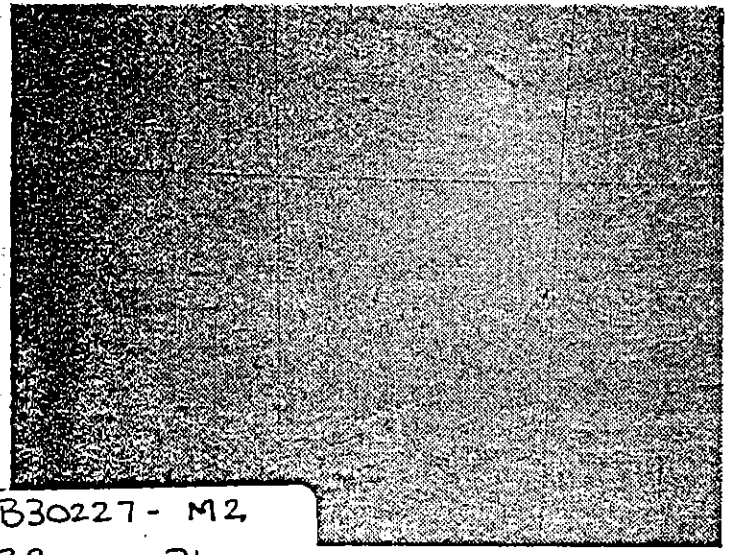

B30227 - M2
R2 - P1

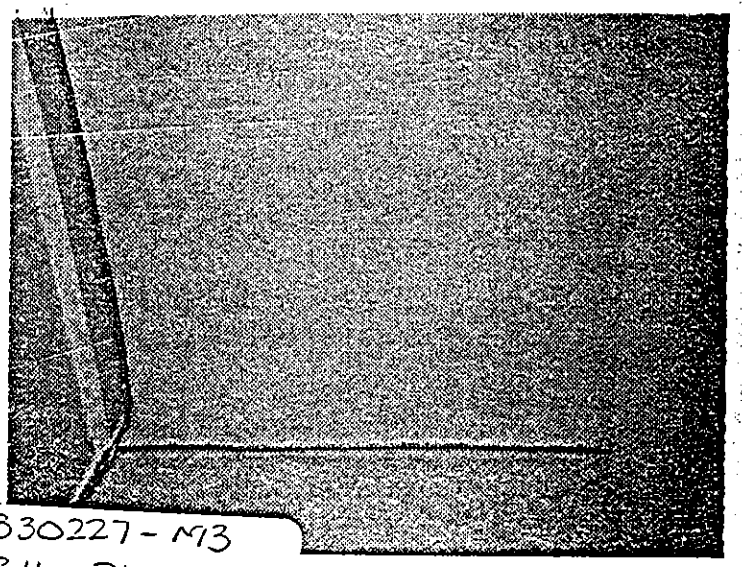

B30227 - M3
R11 - P1

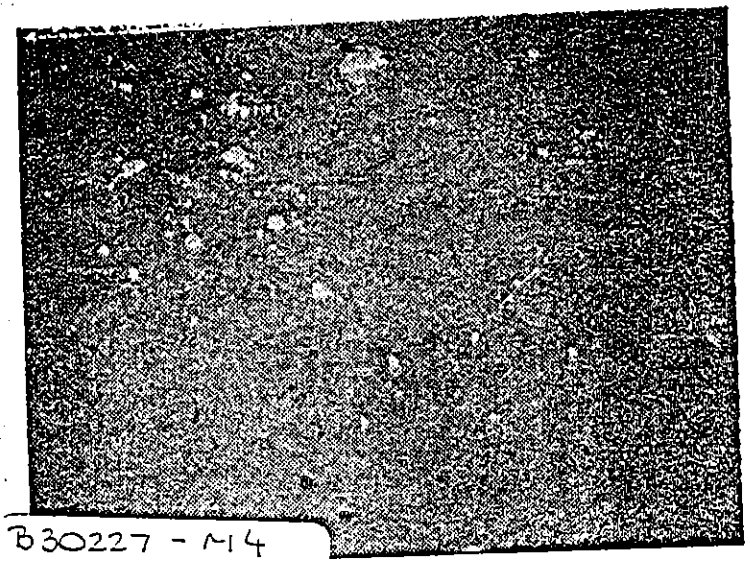

B30227 - M4
R27 - P1

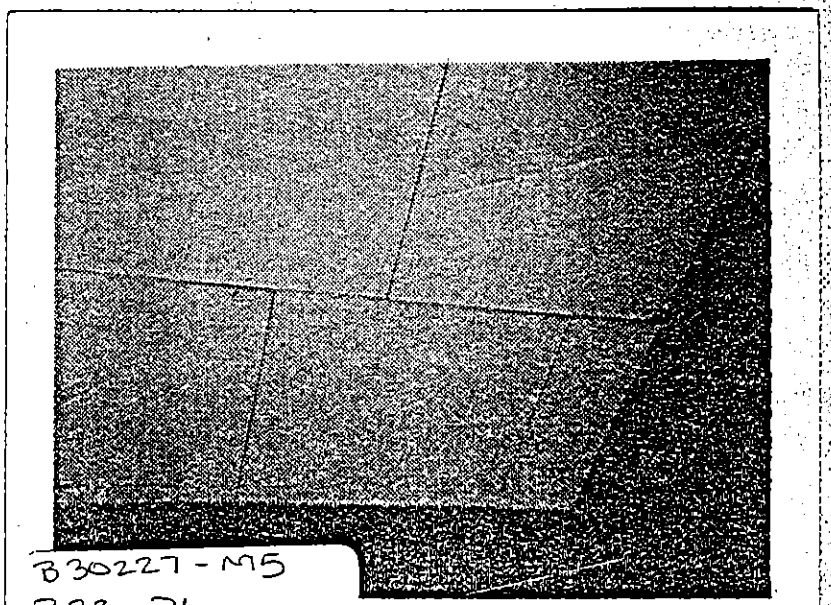

B30227 - M5
R23 - P1

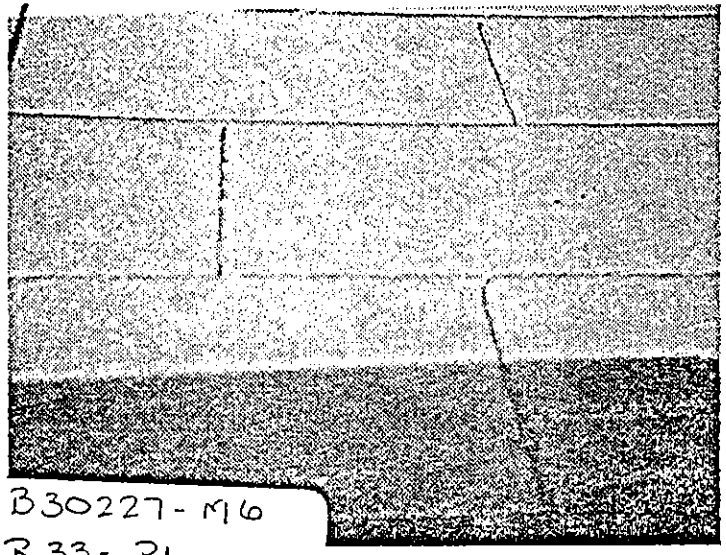

B30227 - M6
R33 - P1

B30687 - M0
R1 - P1

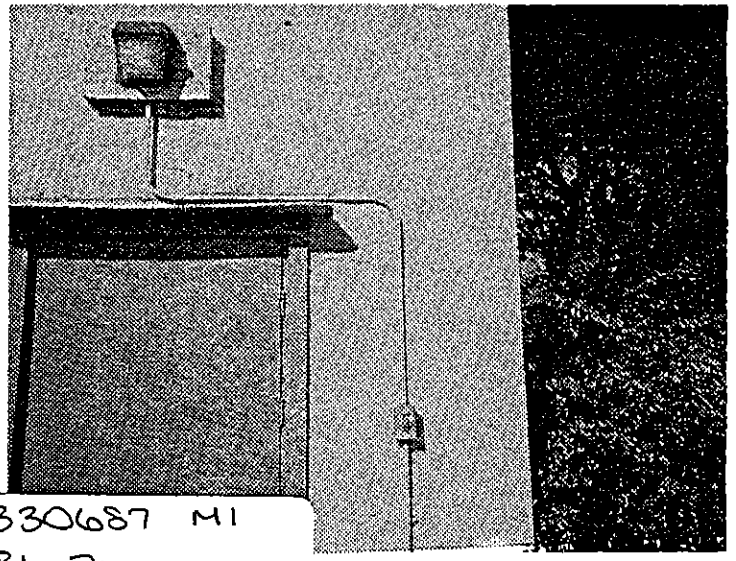

B30687 M1
R1 P1

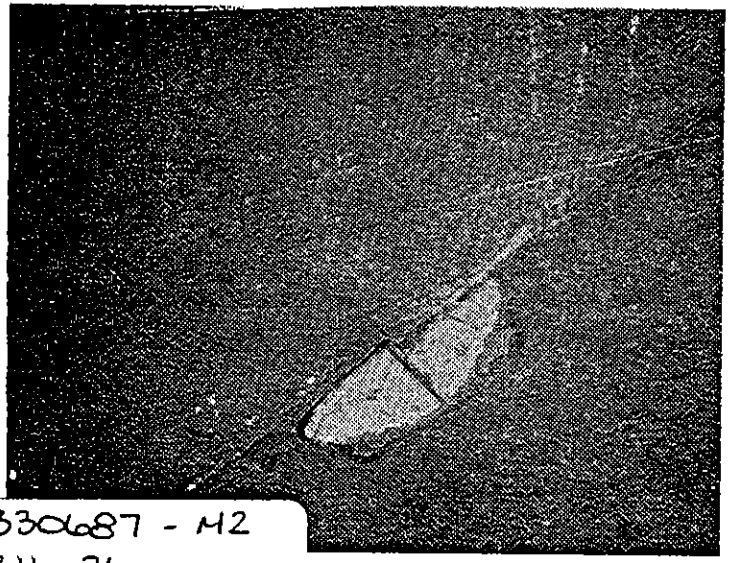

B30687 - M2
R11 - P1

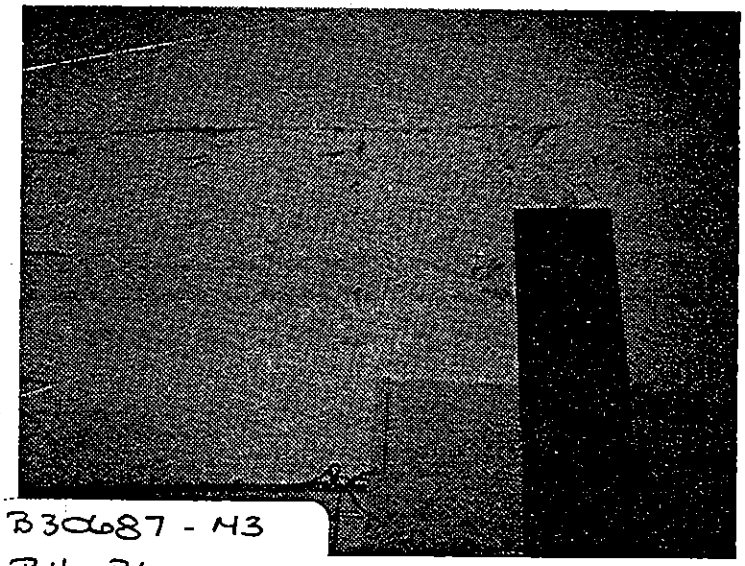

B30687 - M3
R11 - P1

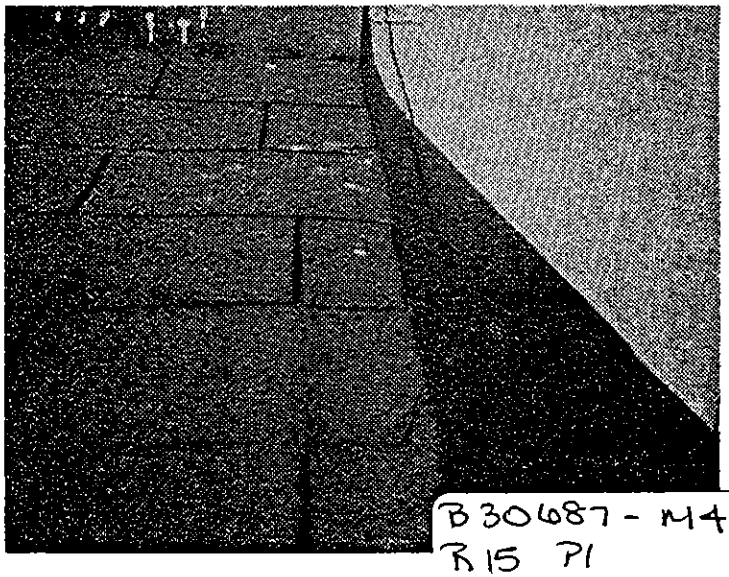

B30687 - M4
R15 P1

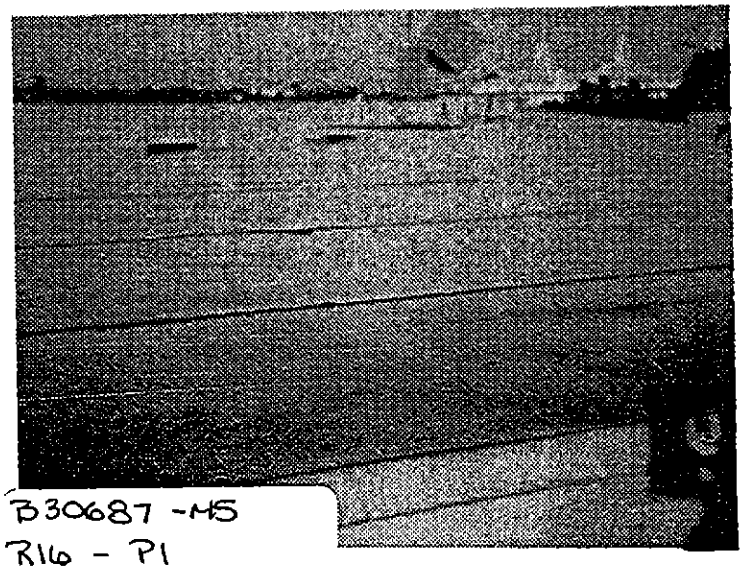

B30687 -M5
R16 - P1

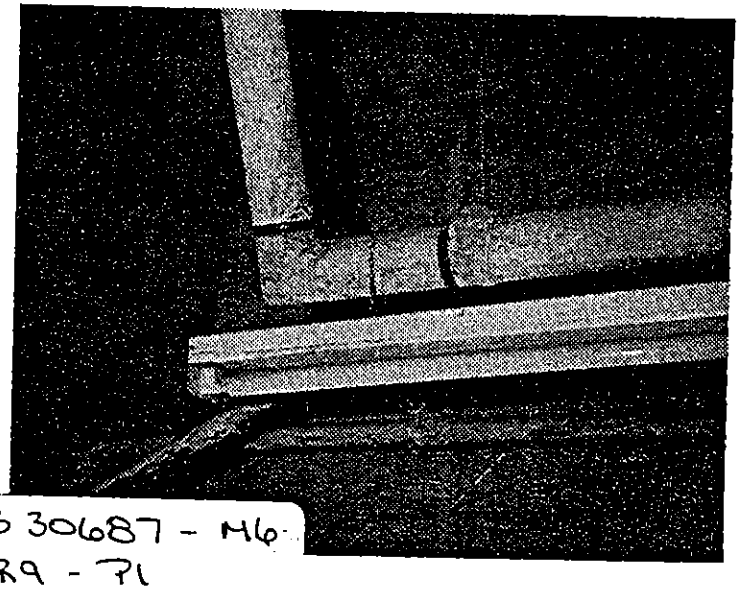

B 30687 - M6
R9 - P1

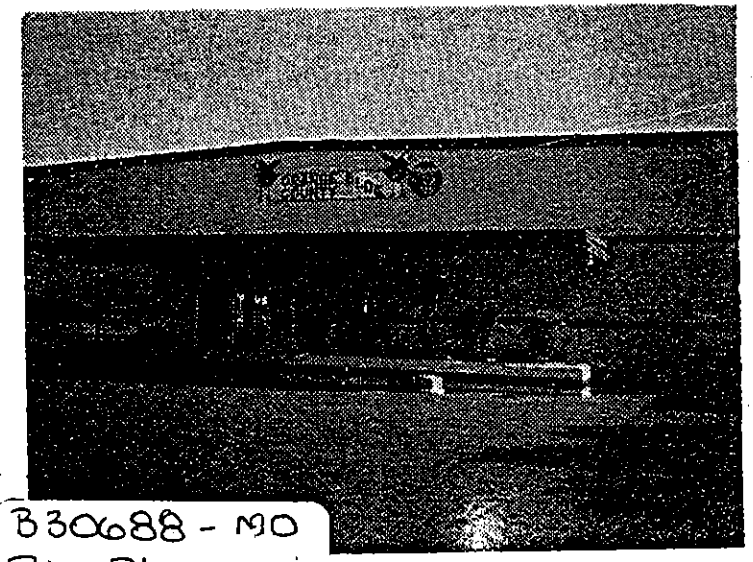

B30688 - M0
R1 - P1

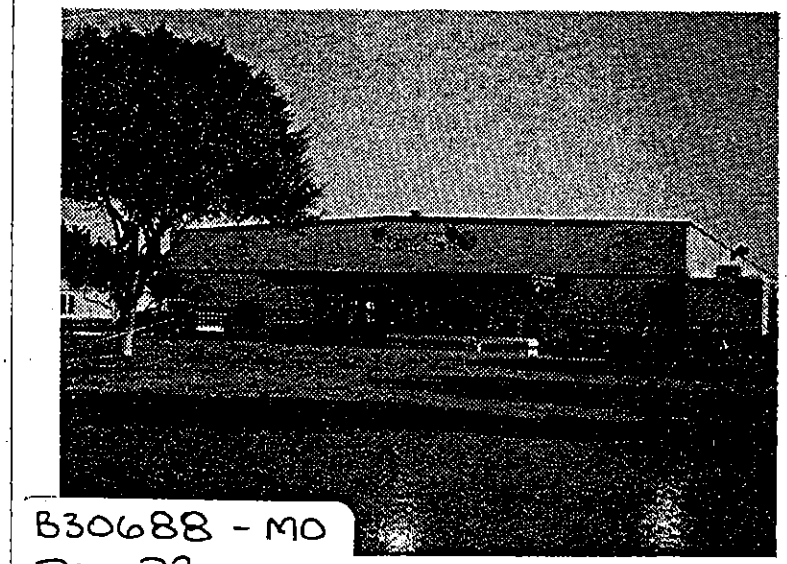

B30688 - M0
R1 - P2

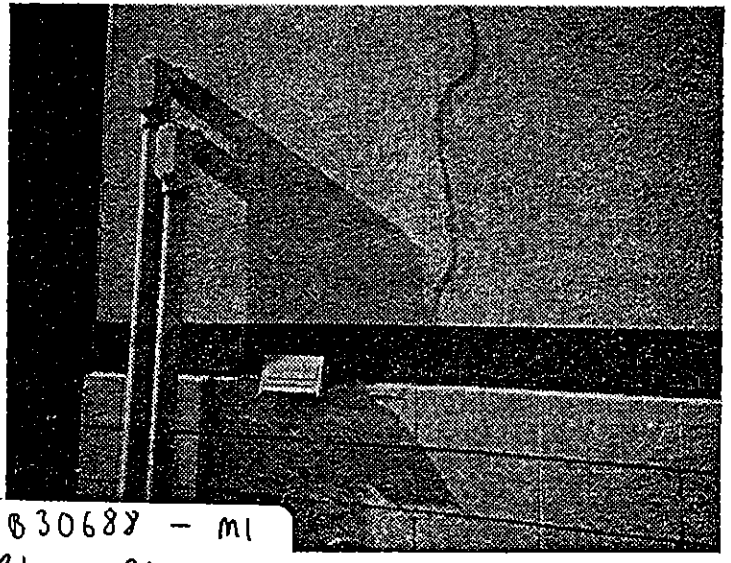

B30688 - M1
R1 - P1

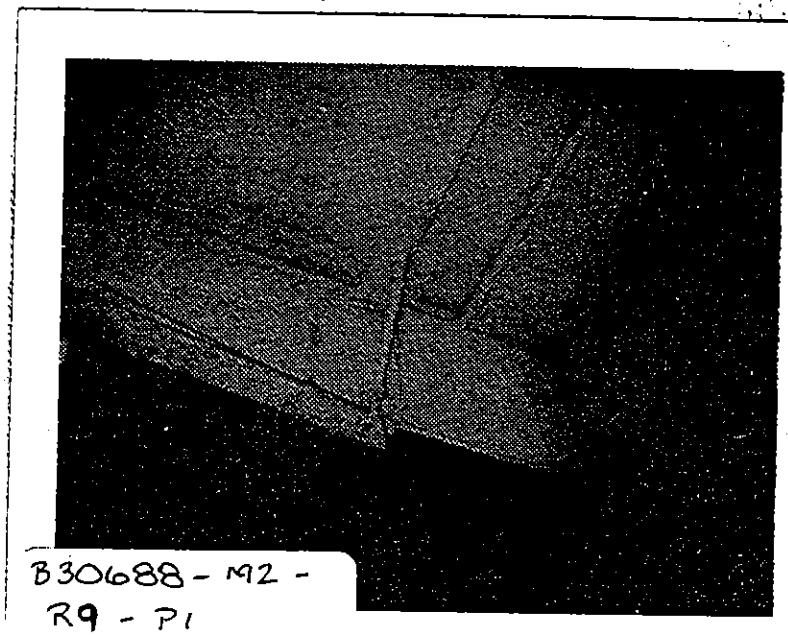

B30688 - M2 -
R9 - P1

B30689 - M10
R1 - P1

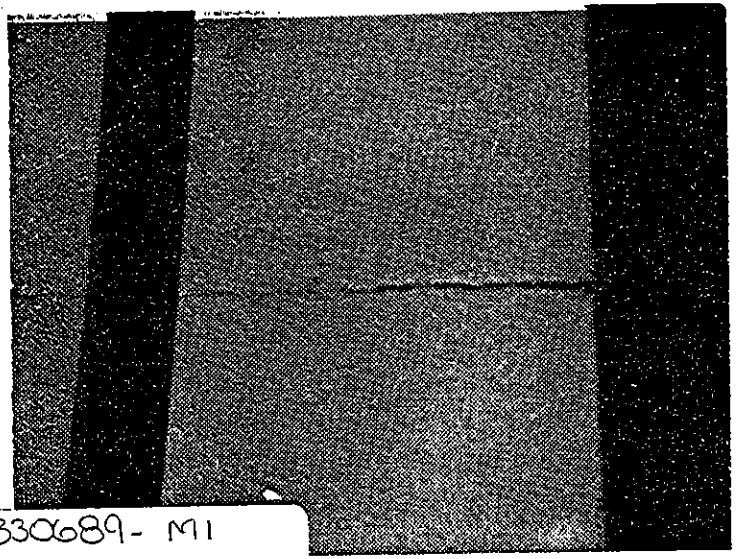

B30689 - M11
R1 - P1

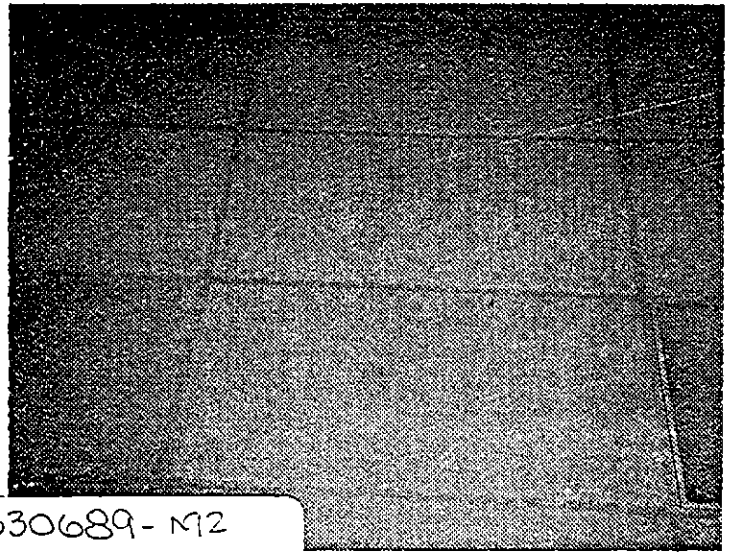

B30689 - M12
R2 - P1

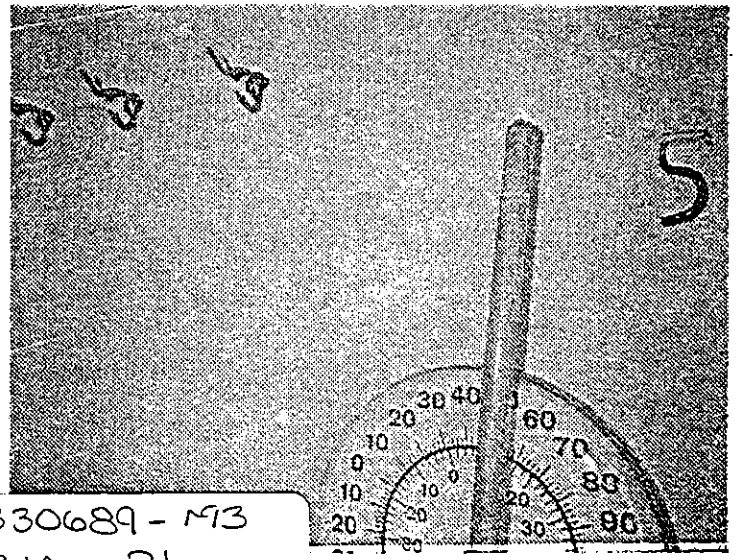

B30689 - M13
R14 - P1

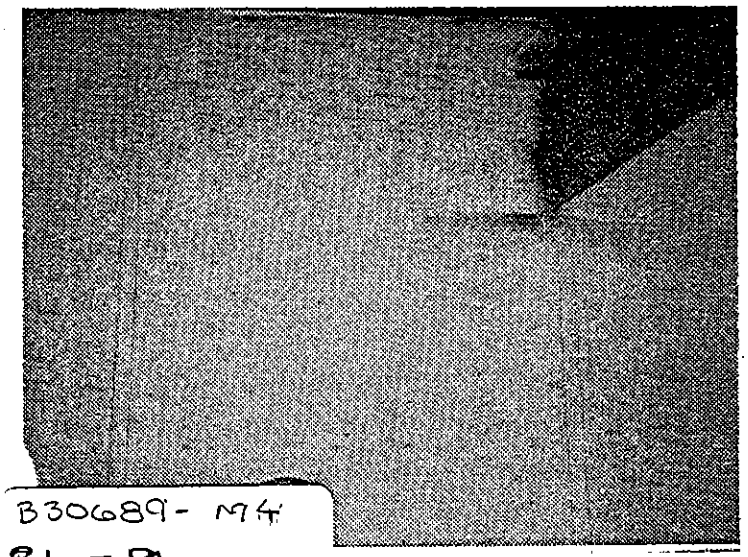

B30689-M4
R1 - P1

B30689-M5
R16 - P1

B30690 M0
R1 - P1

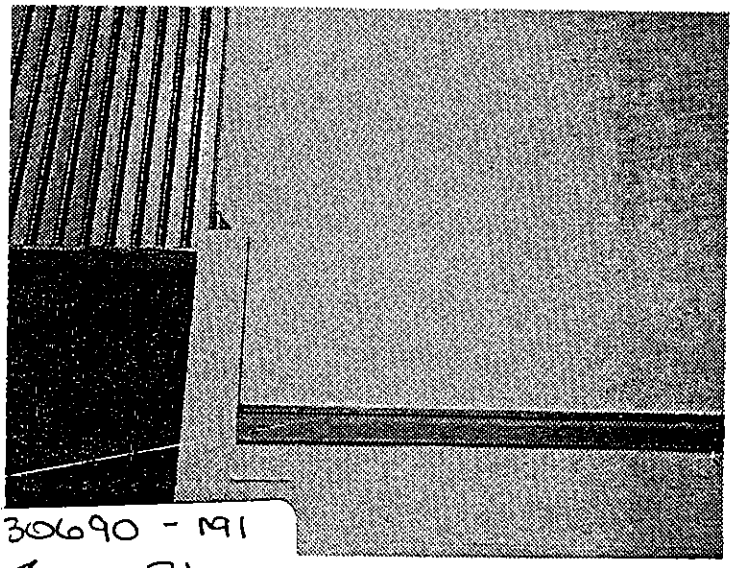

B30690 - M1
R1 - P1

B30690 - M2
R9 - P1

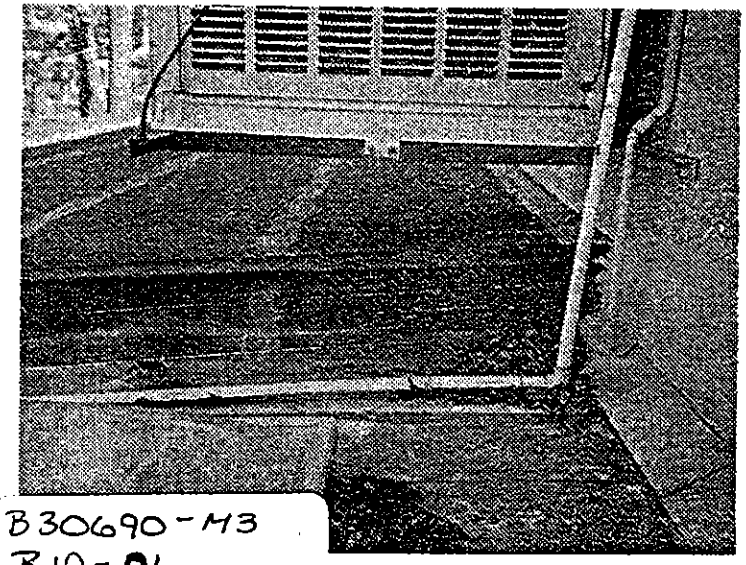

B30690 - M3
R10 - P1

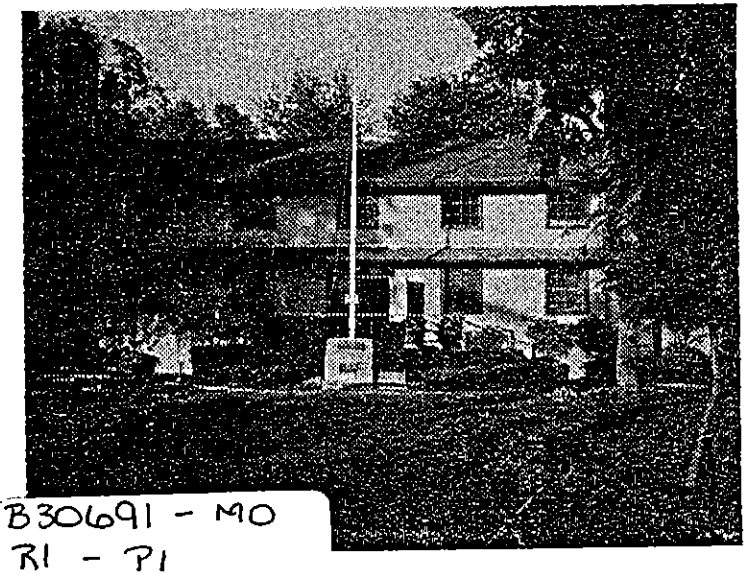

B30691 - M0
R1 - P1

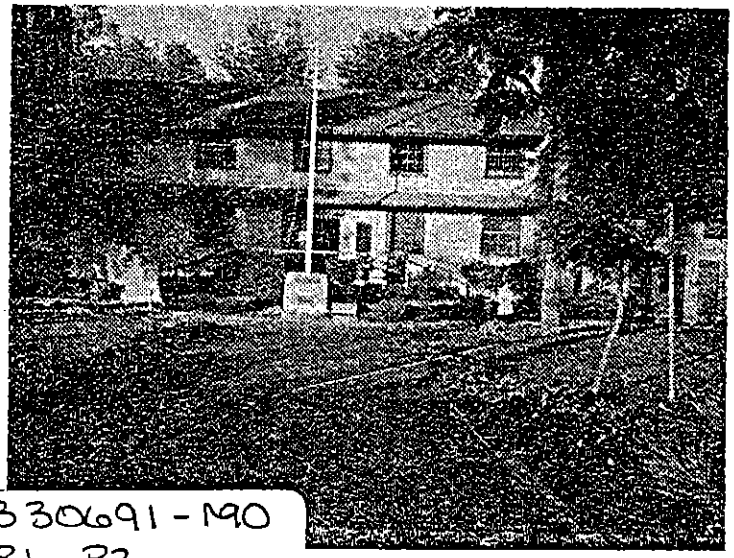

B30691 - M0
R1 - P2

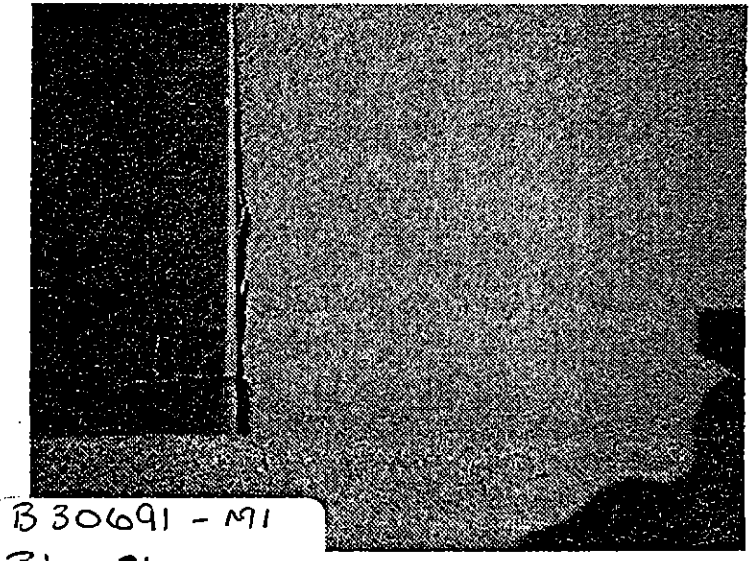

B30691 - M1
R1 - P1

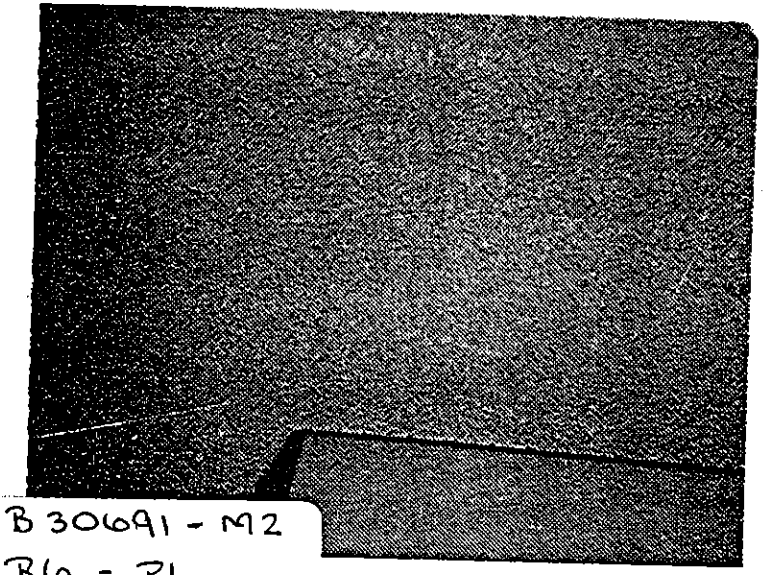

B30691 - M2
R6 - P1

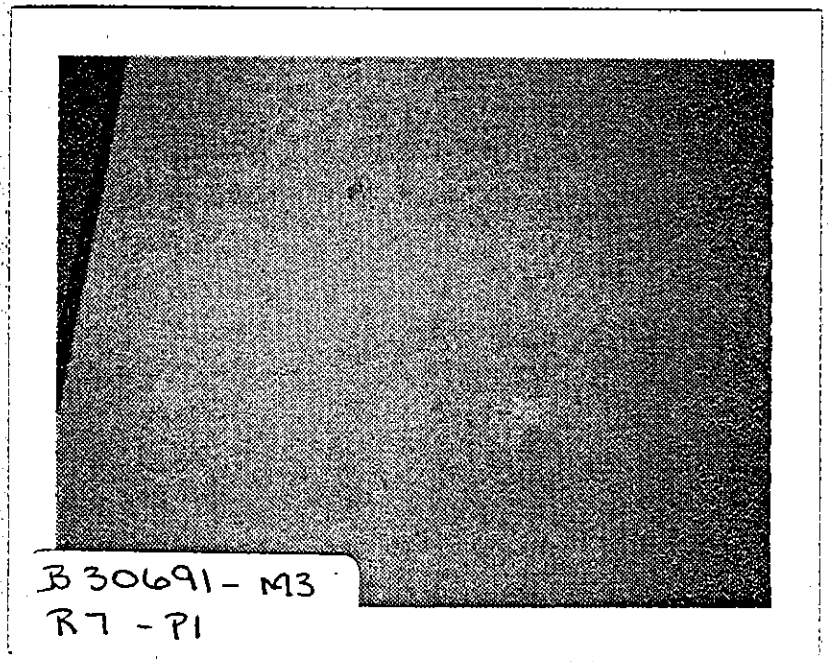

B30691 - M3
R7 - P1

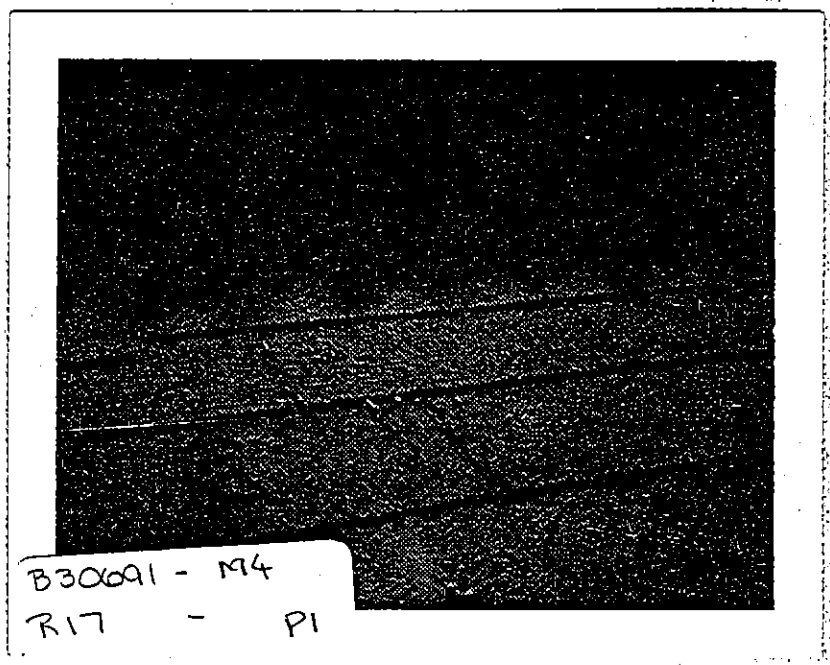

B30691 - M4
R17 - P1